



TILES BY TINA

[www.tilesbytina.com](http://www.tilesbytina.com)

732.539.4655

[tserpico@tilesbytina.com](mailto:tserpico@tilesbytina.com)



Victoria Series Porcelain

GALAXY






# BLUE



**Matte**  
12" x 24"

24" x 48"



**Matte Decor**  
12" x 24"



TILES BY TINA  
[www.tilesbytina.com](http://www.tilesbytina.com)






# DARK



**Matte**  
12" x 24"

24" x 48"



**Matte Decor**  
12" x 24"



**TILES BY TINA**  
[www.tilesbytina.com](http://www.tilesbytina.com)




# GREY



**Matte**  
12" x 24"

24" x 48"



**Matte Decor**  
12" x 24"



TILES BY TINA  
[www.tilesbytina.com](http://www.tilesbytina.com)



# WHITE



**Matte**  
12" x 24"

24" x 48"



**Matte Decor**  
12" x 24"



TILES BY TINA  
[www.tilesbytina.com](http://www.tilesbytina.com)





# CUSTOM CUTS



TILES BY TINA  
[www.tilesbytina.com](http://www.tilesbytina.com)

Custom Field Tile	3" x 12"	3" x 24"	4" x 12"	4" x 24"	6" x 6"	6" x 12"	6" x 24"	8" x 48"	12" x 12"	24" x 24"
Custom Mosaics	1" x 3"	2" x 2"								
Custom Bullnose	4" x 12"	4" x 24"								
Custom Stairtread	12" x 12"	12" x 24"								

**All cuts are subject to minimum order requirements and a 2-3 week production time.**  
 Minimum is 100 sf per color and per size.


# GALAXY SERIES

## Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Dynamic C.O.F. (Matte)	ANSI A137.1-2012	≥ 0.42	Conforms
Bending / Breaking Strength	ISO 10545-4	> 1300N	Conforms
Slip Resistance (Matte)	DIN 51130	R-9	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ASTM-C-1378	Resistant	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

## Colour Variation

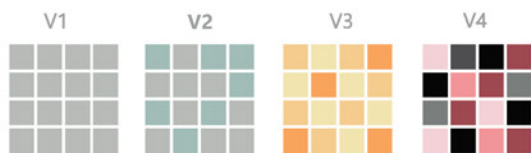

## Examples of Recommended Applications

Residential



Commercial



Indoor



Outdoor



Wall



Floor



## Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
12" x 24" Tile & Decor	7	13.56	57.33	40
24" x 48" Matte	2	15.50	65.70	35



TILES BY TINA  
www.tilesbytina.com



PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
<b>TILE BOND COAT</b>	<ul style="list-style-type: none"> <li>• 56SR LHT Mortar</li> <li>• 66 FlexLite</li> </ul>	<ul style="list-style-type: none"> <li>• 5400 Maxi-Flex</li> <li>• 51/44 Latex Mortar System</li> </ul>	<ul style="list-style-type: none"> <li>• 56SR LHT Mortar</li> <li>• 5400 Maxi-Flex</li> </ul>	<ul style="list-style-type: none"> <li>• 5400 Maxi-Flex</li> <li>• 51/44 Latex Mortar System</li> </ul>
<b>GROUT</b>	<ul style="list-style-type: none"> <li>• 500 PM Unsanded</li> <li>• 600 PM Sanded</li> <li>• ColourMax Plus Quartz</li> </ul>	<ul style="list-style-type: none"> <li>• 600 PM Sanded</li> <li>• 1600 RSG PM Sanded</li> </ul>	<ul style="list-style-type: none"> <li>• 600 PM Sanded</li> <li>• FlexEpoxy 100 Epoxy</li> </ul>	<ul style="list-style-type: none"> <li>• 600 PM Sanded</li> <li>• 1600 RSG Fast Set</li> </ul>
<b>CAULKING</b>	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

**SURFACE PREPARATION (If Required)**

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- Waterproofing: WP900 Waterproof Membrane
- Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

\*For a complete listing of FLEX TILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit [www.flextile.net](http://www.flextile.net)



**“MORE” Surface Care Product Guide**

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

\* Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.

