

Victoria Series
GEM
Series

GLAZED PORCELAIN



TILES BY TINA

www.tilesbytina.com • 732.539.4655 • tserpico@tilesbytina.com

GEM SERIES - Glazed Porcelain (Non-Rectified)



BIANCO
Glossy Finish

6 x 25 cm (2.5" x 10")



ARGENTO
Glossy Finish

6 x 25 cm (2.5" x 10")



CARAIBI
Glossy Finish

6 x 25 cm (2.5" x 10")

GEM SERIES - Glazed Porcelain (Non-Rectified)



COBALTO
Glossy Finish

6 x 25 cm (2.5" x 10")



NERO
Glossy Finish

6 x 25 cm (2.5" x 10")


GEM SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Bending / Breaking Strength	ISO 10545-4	> 1300N	Conforms
Modulus of Rupture	ISO 10545-4	> 35N/mm ²	Conforms
Scratch Hardness	MOHs Scale	MOHs 5	Conforms
Visible Surface Abrasion Resistance	ISO 10545-7	PEI 4	PEI 4 Argento & Bianco
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ISO 10545-14	> Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

Colour Variation

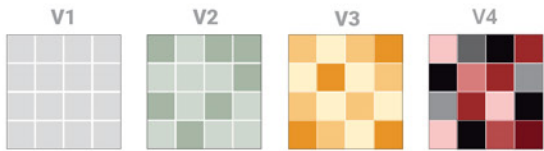

Examples of Recommended Applications

Residential



Commercial



Indoor



Outdoor



Wall



Floor



Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
2.5" x 10" Glossy	50	8.07	32.50	85



TILES BY TINA
www.tilesbytina.com

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	<ul style="list-style-type: none"> • 66 FlexLite PM Mortar • 5400 Maxi-Flex 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System 	<ul style="list-style-type: none"> • 50 PM Mortar • 52 Versatile PM Mortar • 5400 Maxi-Flex 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System
GROUT	<ul style="list-style-type: none"> • 500 PM Unsanded • 600 PM Sanded • 1600UPG PM Grout 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600UPG PM Grout 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600UPG PM Grout • FlexEpoxy 100 Epoxy Grout 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600UPG PM Grout
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

SURFACE PREPARATION (If Required)

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- Waterproofing: WP900 Waterproof Membrane
- Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

* For a complete listing of FLEXILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net




“MORE” Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

* Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.



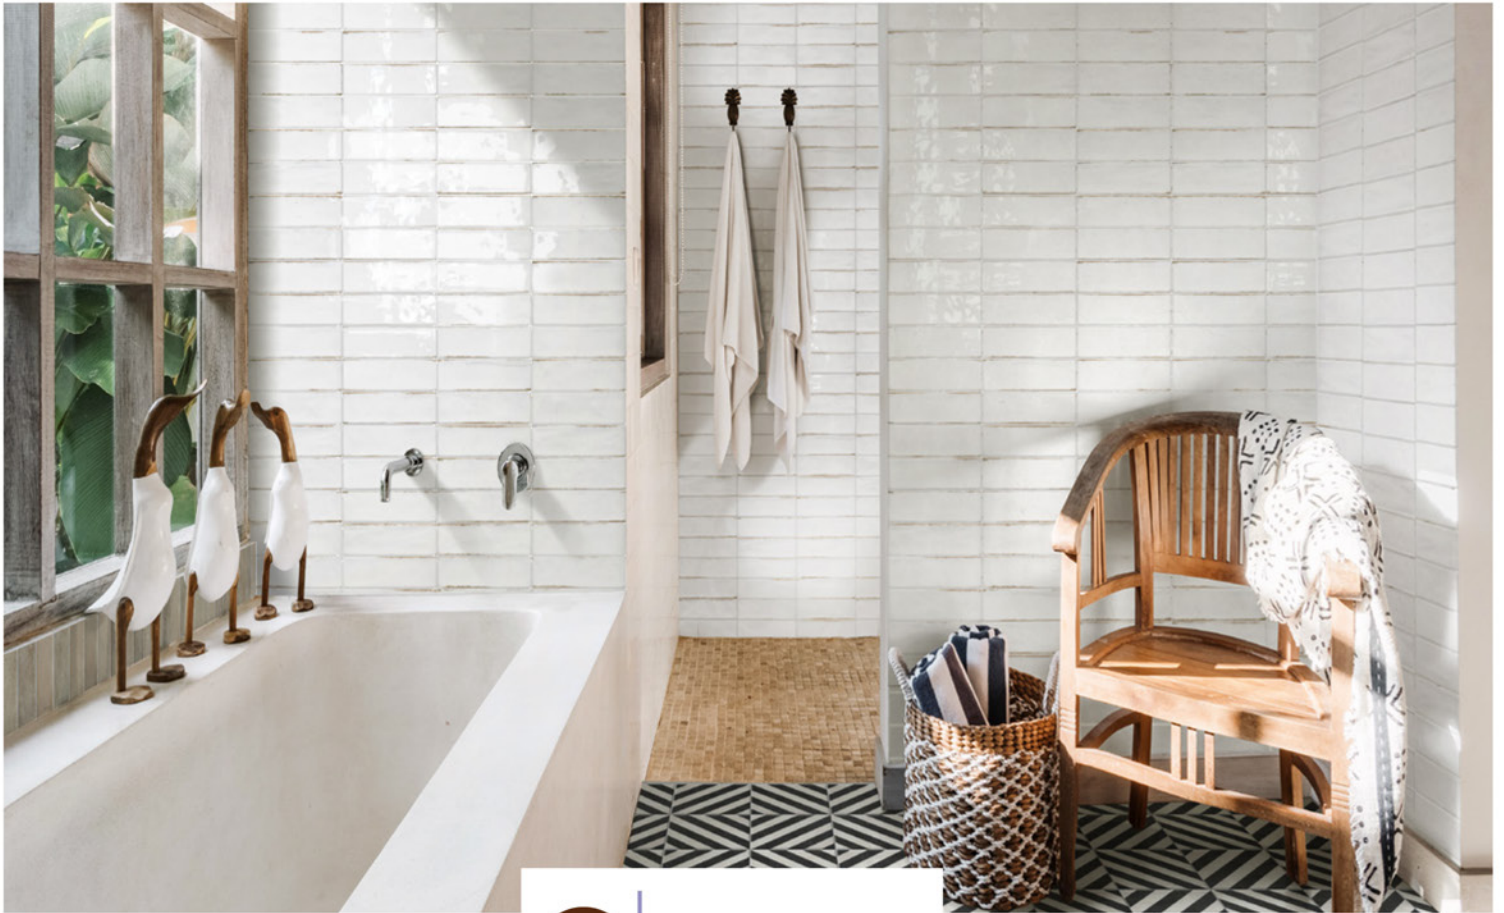

BIANCO




TILES BY TINA
www.tilesbytina.com



ARGENTO



TILES BY TINA
www.tilesbytina.com

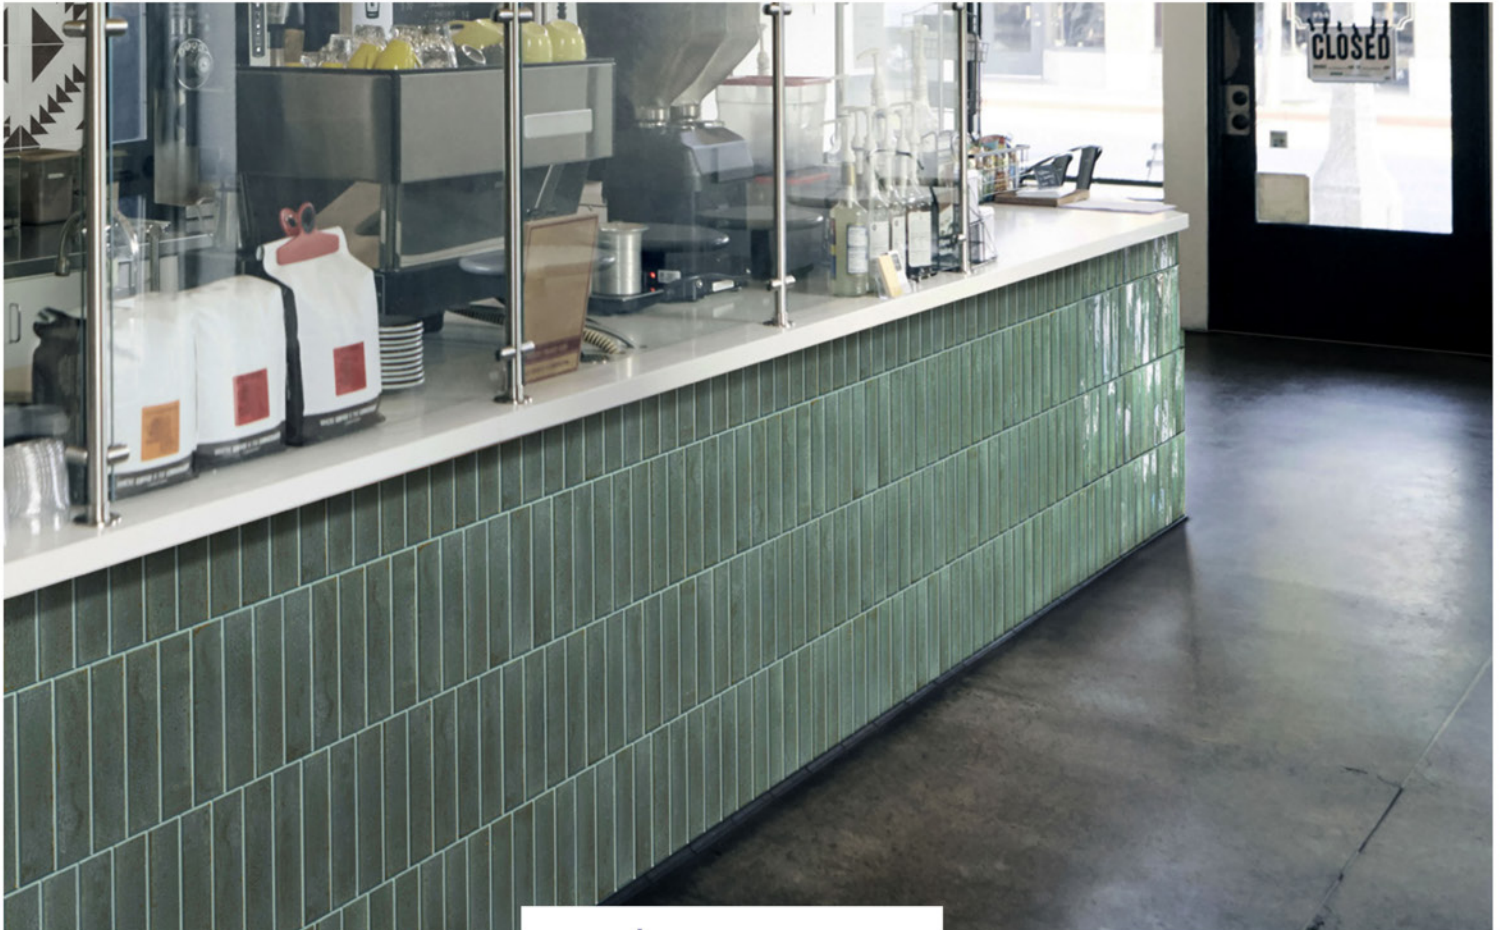

CARAIBI



TILES BY TINA
www.tilesbytina.com




COBALTO



TILES BY TINA
www.tilesbytina.com

NERO

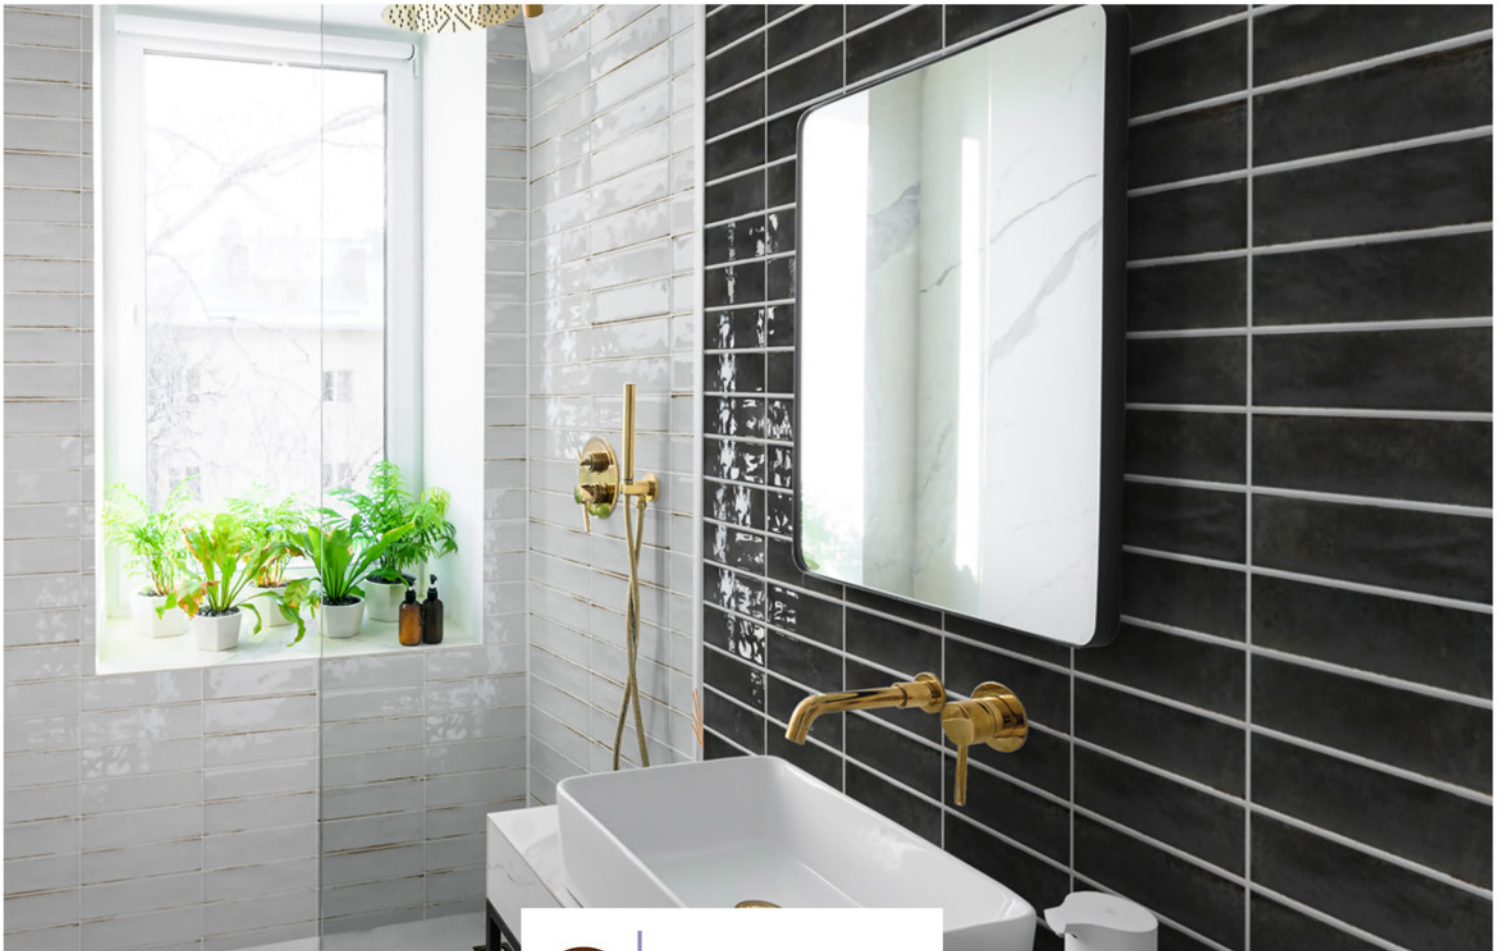

BIANCO & NERO



TILES BY TINA
www.tilesbytina.com