



# Roberto Series Porcelain **Abbey**



TILES BY TINA  
[www.tilesbytina.com](http://www.tilesbytina.com)  
732.539.4655  
[tserpico@tilesbytina.com](mailto:tserpico@tilesbytina.com)



# Roberto Series Abbey

The Abbey collection will give any interior the warm charm of untreated wood. A simple, unadorned floor that expresses its naturalness in long planks playing tribute to rustic floors.



Abbey Fresno 8" x 48" R

## Full Body Porcelain

- ◇ 8"x48" R
- ≡ 16"x48"R - 12"x36" R



TILES BY TINA  
www.tilesbytina.com





Abbey Fresno 8"x48" R - Suite Abbey Fresno 12"x36" R

This Full Body Porcelain floor tile unfolds in traditional colors and shades: Fresno, Roble, Vison, and Gris. A high quality porcelain proposal with a natural or antislip finish for outdoor or water areas.



Abbey Fresno 8"x48" R - Suite Lines Abbey Fresno 16"x48" R



Abbey Roble 8"x48" R



TILES BY TINA  
www.tilesbytina.com



# Abbey

Color Body Porcelain



8"x48" R  
19.5x120 cm



## Fresno

8"x48" R

8"x48" ABS



## Roble

8"x48" R

8"x48" ABS



## Gris

8"x48" R

8"x48" R ABS




## Vison

8"x48" R

8"x48" R ABS




TILES BY TINA  
www.tilesbytina.com



**16"x48" R**  
40x120cm

**12"x36" R**  
30x90.2cm

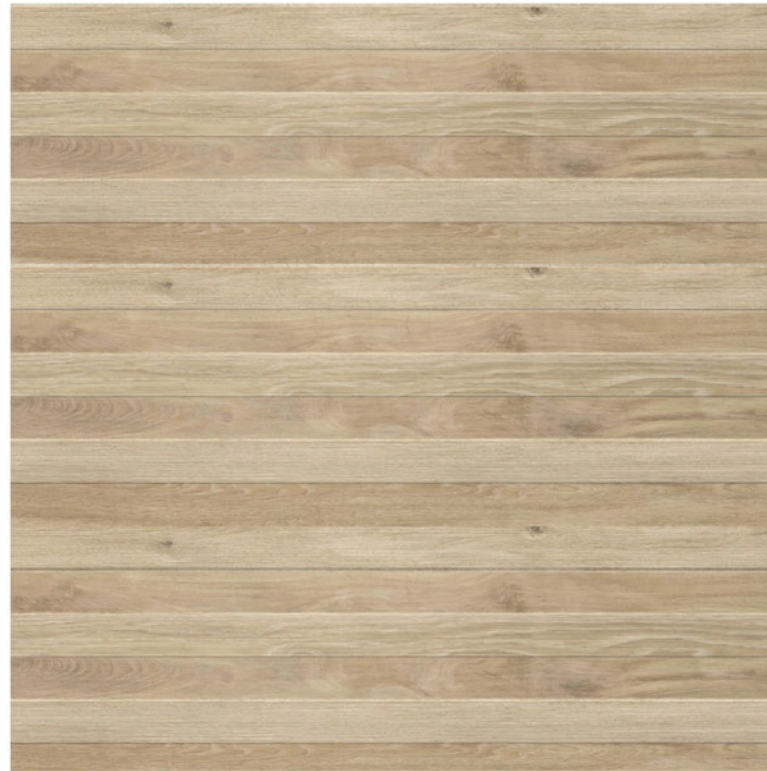

### Suite Lines Roble



16"x48" R



### Suite Roble



12"x36" R

### Technical Specifications (Floor)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 290
Scratch Hardness	MOH's Scale	7
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	4
Deep Abrasion - Unglazed Tiles	C1243	Pass
PEI - Glazed Tiles	C1027	-
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.50
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

### Technical Specifications (Wall)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meet or Exceeds
Scratch Hardness	MOH's Scale	-
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V2
Warpage	C485	Pass
Wedging	C502	Pass

### Packaging Info

Size	SF per carton	PC per carton
8"x48"	10.08	4
16"x48"	15.50	3
12"x36"	14.56	5

