



Roberto Series Flow



TILES BY TINA

www.tilesbytina.com

732.539.4655

tserpico@tilesbytina.com

Flow

Inspired by the movement of water, our Flow collection transforms any room with its fresh color palette and unique texture, creating a space that stimulates the senses. Far from the traditional handmade tiles, this collection creates the ideal oasis for anyone that loves feeling revitalized and enjoys modern adaptations of classics.



Flow Dark Gray 3"x12" Picket

Ceramic Wall & Gres Stoneware

3"x12" - 3"x12" Picket - 4"x16"

8"x9"



TILES BY TINA
www.tilesbytina.com



Flow Tender Gray 4"x16"



TILES BY TINA
www.tilesbytina.com



Flow White 3"x12"




Flow Cosmic Sapphire 3"x12"

Flow

Ceramic Wall & Gres Stoneware








3"x12"
7.7x30.5 cm 4"x16"
7.7x30.5 cm






8"x9" Hex
20x22 cm









White







Tender Gray





Dark Gray

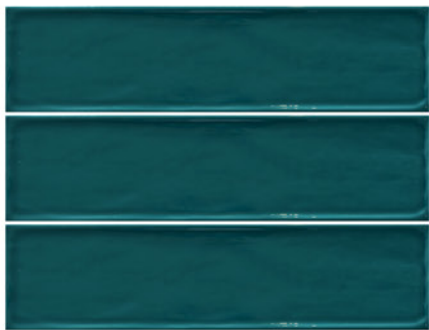

Peacock Green



Cosmic Sapphire




Flow



Ceramic Wall





3"x12"
7.7x30.5 cm

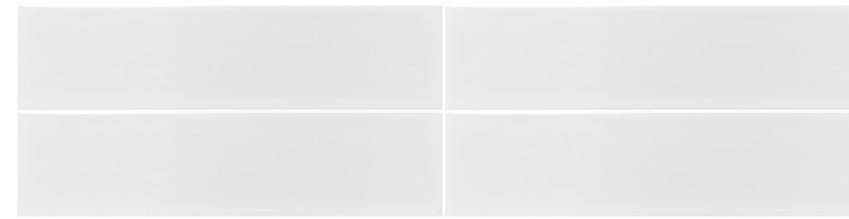



Frost

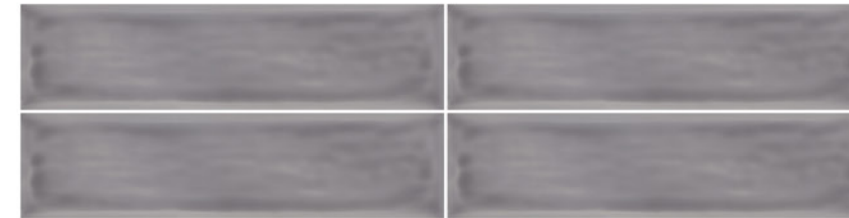



Lavender

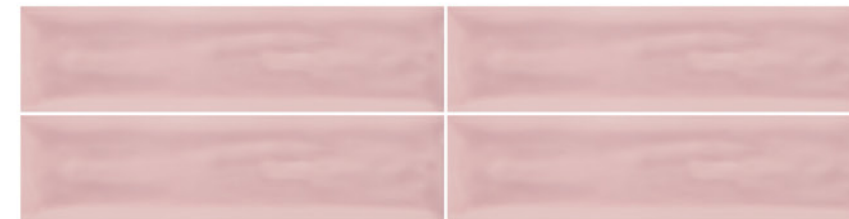



Velvet Pink

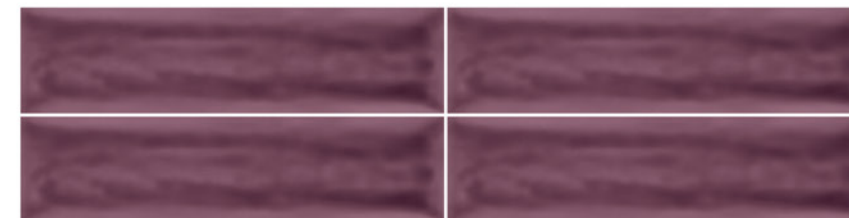


Burgundy

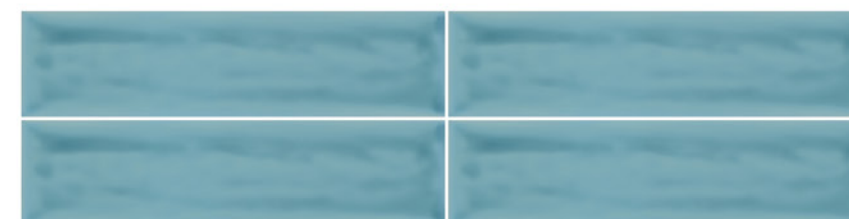

Atoll Blue

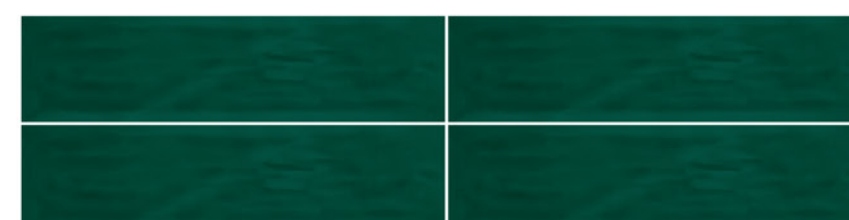

Living Green



TILES BY TINA
www.tilesbytina.com



Technical Specifications - 3"x12, 3"x12" Picket & 4"x16"

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or Exceeds
Scratch Hardness	MOH's Scale	N/A
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V3
Warpage	C485	Pass
Wedging	C502	Pass

Technical Specifications - Hexagon

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<3%
Break Strength	C648	Min. 250
Scratch Hardness	MOH's Scale	5
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	3
Deep Abrasion - Unglazed Tiles	C1243	-
PEI Glazed Tiles	C1027	4
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A127.1	>=0.42
Shade and Texture Rating	CTDA "V"	V2
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton
3"x12"	12.64	50
3"x12" Picket	11.79	50
3"x12" Bullnose	12.59	50
8"x9" Hexagon	10.36	28
4"x16"	15.33	32