

Victoria Series I COCCI Series

PORCELAIN



TILES BY TINA

www.tilesbytina.com • 732.539.4655 • tserpico@tilesbytina.com

Victoria Series

I COCCI SERIES - Coloured Base Porcelain (Rectified)

Matte Finish

CALCE (Off White)



90 x 90 cm (36 x 36)

CALCE (Off White) DECOR



90 x 90 cm (36 x 36)



TILES BY TINA
www.tilesbytina.com

I COCCI SERIES - Coloured Base Porcelain (Rectified) Matte Finish

CENERE (Grey)



90 x 90 cm (36 x 36)

CENERE (Grey) DECOR



90 x 90 cm (36 x 36)



I COCCI SERIES - Coloured Base Porcelain (Rectified) Matte Finish

CEMENTO (Dark Grey)



90 x 90 cm (36 x 36)

CEMENTO (Dark Grey) DECOR



90 x 90 cm (36 x 36)



I COCCI SERIES - Coloured Base Porcelain (Rectified) Matte Finish

GRAFITE (Black)



90 x 90 cm (36 x 36)

GRAFITE (Black) DECOR



90 x 90 cm (36 x 36)




I COCCI SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Dynamic C.O.F.	ANSI A137.1-2012	≥ 0.42	Conforms
Slip Resistance	DIN 51130	R-9	Conforms
Bending / Breaking Strength	ISO 10545-4	>1300N	Conforms
Modulus of Rupture	ISO 10545-4	>35 N/mm ²	Conforms
Deep Abrasion Resistance	ISO 10545-6	≤ 175 mm ³	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Stain Resistance	ISO 10545-14	> Class 3	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

Colour Variation

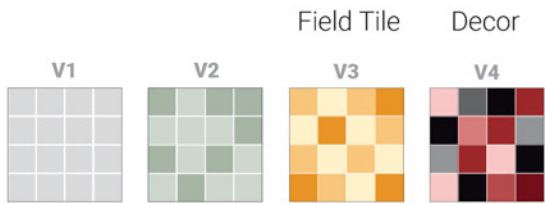

Examples of Recommended Applications



Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
36" x 36" Matte	2	17.43	79.36	20



TILES BY TINA
www.tilesbytina.com

Recommended FLEXILE Installation Systems

For other suitable options & complete installation details, visit www.flextile.net

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	<ul style="list-style-type: none"> • 66 FlexLite • 56SR LHT Mortar 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System 	<ul style="list-style-type: none"> • 56SR LHT Mortar • 5400 Maxi-Flex 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System
GROUT	<ul style="list-style-type: none"> • 500 PM Unsanded • 600 PM Sanded • ColourMax Plus Quartz 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600 RSG Fast Setting 	<ul style="list-style-type: none"> • 600 PM Sanded • FlexEpoxy 100 Epoxy 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600 RSG Fast Set
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

SURFACE PREPARATION (If Required)

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- Waterproofing: WP900 Waterproof Membrane
- Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

* For a complete listing of FLEXILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net



"MORE" Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

* Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.





CENERE (Grey) & CENERE (Grey) Decor



GRAFITE (Black) & GRAFITE (Black) Decor



TILES BY TINA
www.tilesbytina.com