



LONDON BRICK Series

GLAZED PORCELAIN

Victoria Series



TILES BY TINA

www.tilesbytina.com • 732.539.4655 • tserpico@tilesbytina.com

London Brick Series - Glazed Porcelain

White



6cm x 25cm (2.3" x 10")

Grey



6cm x 25cm (2.3" x 10")



TILES BY TINA
www.tilesbytina.com

London Brick Series - Glazed Porcelain

Black



6cm x 25cm (2.3" x 10")

Charcoal



6cm x 25cm (2.3" x 9.8")



TILES BY TINA
www.tilesbytina.com

London Brick Series - Glazed Porcelain

Fog



6cm x 25cm (2.3" x 10")

Beige



6cm x 25cm (2.3" x 9.8")



TILES BY TINA
www.tilesbytina.com

London Brick Series - Glazed Porcelain

Brown



6cm x 25cm (2.3" x 10")

Sunset (Rust)



6cm x 25cm (2.3" x 9.8")


LONDON BRICK SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Slip Resistance	DIN 51130	> R9	Conforms
Dynamic C.O.F.	ANSI A137.1-2012	≥ 0.42	Conforms
Scratch Hardness	MOHs Scale	MOHs 5	Conforms
Chemical Resistance	EN ISO 10545-13	min. UB	Conforms
Visible Surface Abrasion Resistance	ISO 10545-7	PEI 4	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ISO 10545-14	> Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

Colour Variation

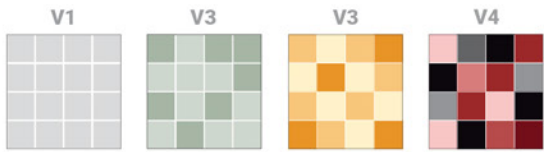

Examples of Recommended Applications



Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
2.3" x 10"	32	6.24	21.56	100



TILES BY TINA
www.tilesbytina.com

Recommended FLEX TILE Installation Systems

For other suitable options & complete installation details, visit www.flextile.net

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	<ul style="list-style-type: none"> • 66 FlexLite • 56SR LHT Mortar 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System 	<ul style="list-style-type: none"> • 50 PM Mortar • 52 Versatile 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System
GROUT	<ul style="list-style-type: none"> • 500 PM Unsanded • 600 PM Sanded • ColourMax Plus Quartz 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600 RSG Fast Setting 	<ul style="list-style-type: none"> • 600 PM Sanded • FlexEpoxy 100 Epoxy 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600 RSG Fast Set
CAULKING	Ultra Performance Caulk (colour-matched to grout)	Ultra Performance Caulk (colour-matched to grout)	Ultra Performance Caulk (colour-matched to grout)	Ultra Performance Caulk (colour-matched to grout)

SURFACE PREPARATION (If Required)

- **Floor levelling:** 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- **Waterproofing:** WP900 Waterproof Membrane
- **Crack Isolation/Uncoupling:** Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

**For a complete listing of FLEX TILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net*



"MORE" Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

**Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.*





CHARCOAL



WHITE



TILES BY TINA
www.tilesbytina.com



GREY



FOG



TILES BY TINA
www.tilesbytina.com