

Victoria Series

NOON Series

PORCELAIN



TILES BY TINA

www.tilesbytina.com • 732.539.4655 • tserpico@tilesbytina.com

NOON Series - Unglazed Porcelain (Rectified)

DAYLIGHT (White/Ivory)



8" x 48" Matte

EMBER (Grey)



8" x 48" Matte



NOON Series - Unglazed Porcelain (Rectified)

HONEY (Beige)



8" x 48" Matte

BURNET (Brown)



8" x 48" Matte



NOON Series - Unglazed Porcelain (Rectified)

CHARCOAL



8" x 48" Matte


NOON SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ASTM C373	>0.5%	Conforms
D.C.O.F	ANSI A137.1/2012	>0.42	Conforms
Bending/Breaking Strength	ISO 10545-4	>1300N	Conforms
Modulus of Rupture	ISO 10545-4	>35N/mm ²	Conforms
Deep Abrasion Resistance	ISO 10545-6	<175 mm ³	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ISO 10545-14	>Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

Colour Variation

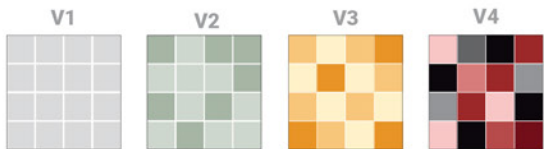

Examples of Recommended Applications

Residential Commercial



Indoor



Outdoor



Wall



Floor



Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
8" x 48" Matte	6	15.50	66	32



TILES BY TINA
www.tilesbytina.com

Recommended FLEXITILE Installation Systems

For other suitable options & complete installation details, visit www.flextile.net

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	<ul style="list-style-type: none"> • 66 FlexLite • 56SR Full Coverage LHT 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System 	<ul style="list-style-type: none"> • 56SR Full Coverage LHT • 61 Full Coverage LHT 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System
GROUT	<ul style="list-style-type: none"> • 500 PM Unsanded • 600 PM Sanded • ColourMax Plus Quartz 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600 RSG Fast Setting 	<ul style="list-style-type: none"> • 600 PM Sanded • FlexEpoxy 100 Epoxy 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600 RSG Fast Set
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

SURFACE PREPARATION (If Required)

- **Floor levelling:** 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- **Waterproofing:** WP900 Waterproof Membrane
- **Crack Isolation/Uncoupling:** Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

*For a complete listing of FLEXITILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net



“MORE” Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

* Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface. It is recommended to seal polished porcelains with a penetrating sealer prior to grouting.





HONEY (Beige)



BURNET (Brown)



TILES BY TINA
www.tilesbytina.com