

TILLS DI TINA

www.tilesbytina.com • 732.539.4655 • tserpico@tilesbytina.com

### **GEM** SERIES - Glazed Porcelain (Non-Rectified)



BIANCO Glossy Finish 6 x 25 cm (2.5" x 10") Nominal Thickness: 9 mm



ARGENTO
Glossy Finish
6 x 25 cm (2.5" x 10")
Nominal Thickness: 9 mm



CARAIBI Glossy Finish 6 x 25 cm (2.5" x 10") Nominal Thickness: 9 mm



COBALTO Glossy Finish 6 x 25 cm (2.5" x 10") Nominal Thickness: 9 mm



NERO Glossy Finish 6 x 25 cm (2.5" x 10") Nominal Thickness: 9 mm



## **GEM** SERIES - Glazed Porcelain (Non-Rectified)

## KITKAT DECORS



BIANCO Kitkat Decor Glossy Finish 12.5 x 25 cm (5" x 10") Nominal Thickness: 9 mm



ARGENTO Kitkat Decor Glossy Finish 12.5 x 25 cm (5" x 10") Nominal Thickness: 9 mm




CARAIBI Kitkat Decor Glossy Finish 12.5 x 25 cm (5" x 10") Nominal Thickness: 9 mm



# **GEM** SERIES - Glazed Porcelain (Non-Rectified)

## KITKAT DECORS

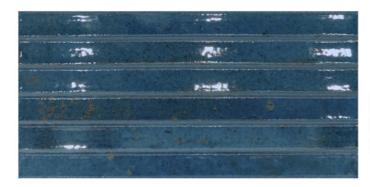

COBALTO Kitkat Decor Glossy Finish 12.5 x 25 cm (5" x 10") Nominal Thickness: 9 mm



NERO Kitkat Decor Glossy Finish 12.5 x 25 cm (5" x 10") Nominal Thickness: 9 mm




#### **GEM SERIES**

#### Tests Performed - Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Bending / Breaking Strength	ISO 10545-4	> 1300N	Conforms
Modulus of Rupture	ISO 10545-4	> 35N/mm <sup>2</sup>	Conforms
Scratch Hardness	MOHs Scale	MOHs 5	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ISO 10545-14	> Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

# **Colour Variation**



# **Examples of Recommended Applications**

Residential Commercial





Indoor



Outdoor

Wall



# **Packing Details**

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
2.5" x 10" Glossy	50	8.07	32.50	85
5" x 10" Glossy	26	8.71	29.38	81





# **Recommended FLEXTILE Installation Systems**

For other suitable options & complete installation details, visit www.flextile.net

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	• 66 FlexLite PM Mortar • 5400 Maxi-Flex	• 5400 Maxi-Flex • 51/44 Latex Mortar System	<ul><li>50 PM Mortar</li><li>52 Versatile PM Mortar</li><li>5400 Maxi-Flex</li></ul>	• 5400 Maxi-Flex • 51/44 Latex Mortar System
GROUT	<ul><li>500 PM Unsanded</li><li>600 PM Sanded</li><li>1600UPG PM Grout</li></ul>	• 600 PM Sanded • 1600UPG PM Grout	<ul><li>600 PM Sanded</li><li>1600UPG PM Grout</li><li>FlexEpoxy 100 Epoxy Grout</li></ul>	• 600 PM Sanded • 1600UPG PM Grout
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

#### SURFACE PREPARATION (If Required)

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- · Waterproofing: WP900 Waterproof Membrane
- Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

<sup>\*</sup> For a complete listing of FLEXTILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net




### "MORE" Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

<sup>\*</sup>Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.





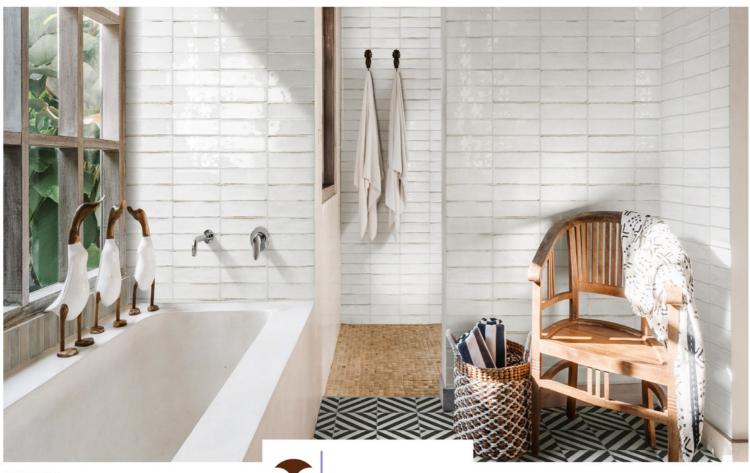

TILES BY TINA www.tilesbytina.com

**BIANCO** 







TILES BY TINA www.tilesbytina.com


**ARGENTO** 



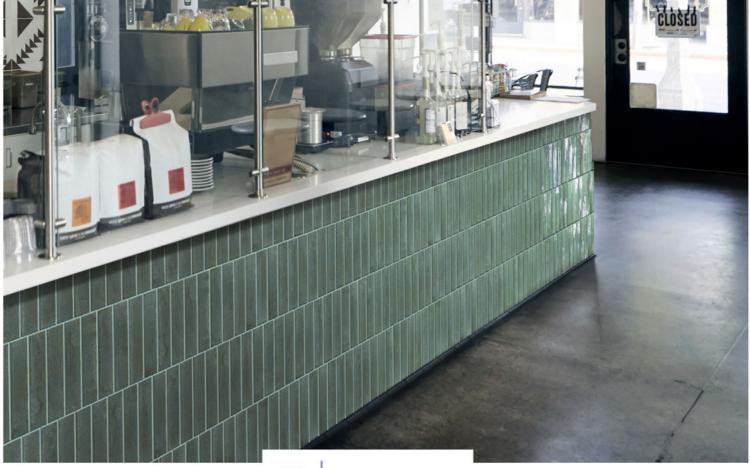

**CARAIBI** 

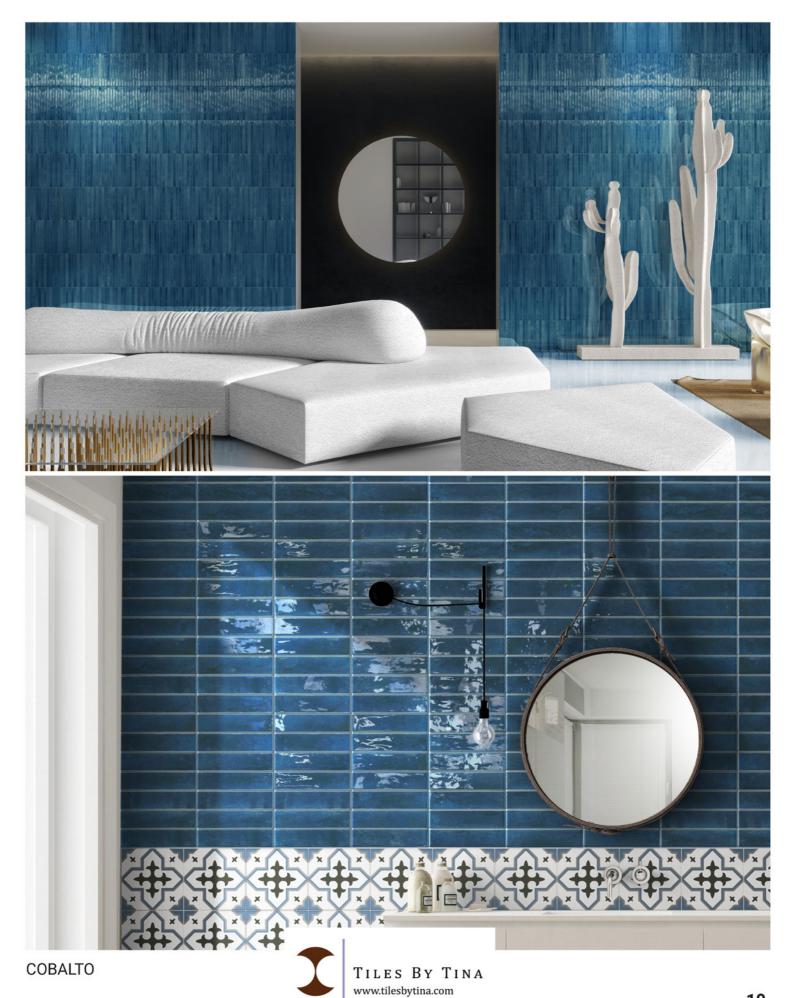

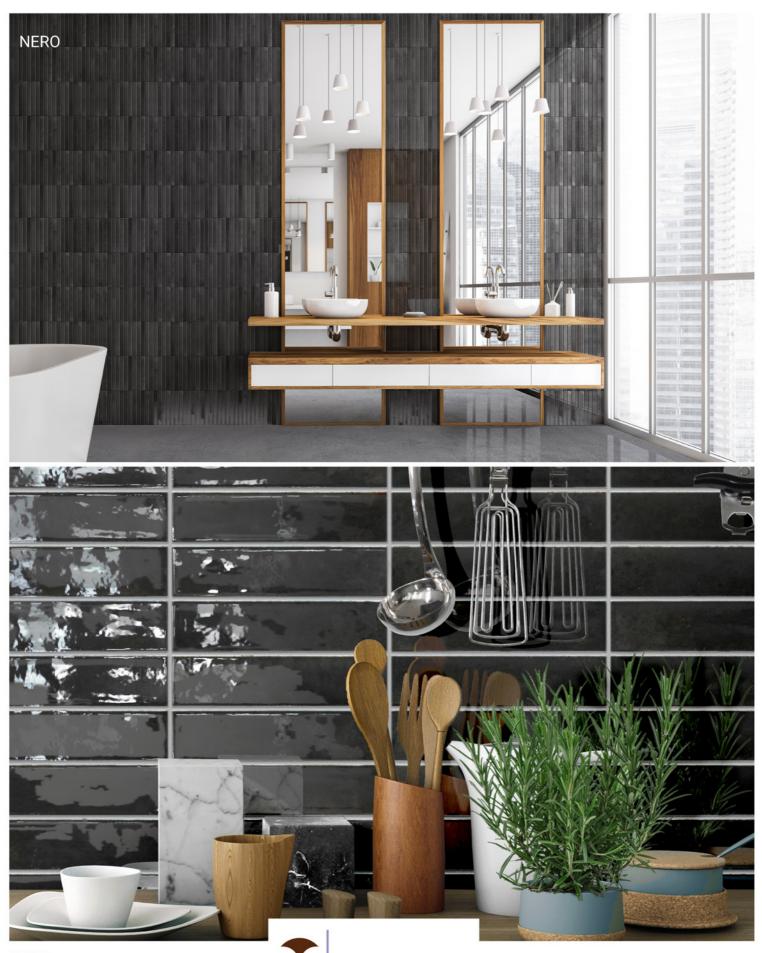

TILES BY TINA www.tilesbytina.com