Victoria METROPOLITAN Series QUARRY



www.tilesbytina.com • 732.539.4655 • tserpico@tilesbytina.com

Metropolitan Series - Quarry

PURITAN GREY



15 x 15 cm (6 x 6)

MAYFLOWER RED



15 x 15 cm (6 x 6)

Trims are also stocked for Metropolitan Series. Please ask your Sales Representative for further detailed information.



Metropolitan Series - Quarry (Abrasive)

PURITAN GREY EXTRA



19.37 x 19.37 cm (8 x 8) 15 x 15 cm (6 x 6) Abrasive Finish

MAYFLOWER RED EXTRA



 $15 \times 15 \text{ cm } (6 \times 6)$ Abrasive Finish




METROPOLITAN SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ASTM C373 & C67	> 0.5 - < 3%	Conforms
Dynamic C.O.F.	ANSI A137.1-2012	≥ 0.42	Conforms
Bending/Breaking Strength	ASTM-C648	> 250 lbs	Conforms
Deep Abrasion Resistance	ASTM C-1243	≤ 275 mm³	Conforms
Scratch Hardness	MOHs Scale	MOHs 5	Conforms
Chemical Resistance	ASTM C-650	min. UB	Conforms
Frost Resistance	ASTM C-1026	Required	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

Colour Variation



Examples of Recommended Applications

Residential



Light Commercial Commercial



Medium



Heavy

Indoor



Outdoor



Wall





Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
8" x 8"	16	6.45	36.96	80
6" x 6"	28	7	40.60	70





Recommended FLEXTILE Installation Systems

For other suitable options & complete installation details, visit www.flextile.net

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	• 66 FlexLite • 5400 MaxiFlex	• 5400 Maxi-Flex • 51/44 Latex Mortar System	• 52 Versatile • 5400 Maxi-Flex	• 5400 Maxi-Flex • 51/44 Latex Mortar System
GROUT	• 600 PM Sanded • ColourMax Plus Quartz	• 600 PM Sanded • 1600 RSG Fast Setting	600 PM SandedFlexEpoxy 100 Epoxy	• 600 PM Sanded • 1600 RSG Fast Set
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

SURFACE PREPARATION (If Required)

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- · Waterproofing: WP900 Waterproof Membrane
- · Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

^{*} For a complete listing of FLEXTILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net



"MORE" Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

 $[*] Always \ test \ in an inconspicuous \ area \ to \ make \ sure \ the \ product \ is \ achieving \ the \ desired \ results \ and \ is \ not \ damaging \ the \ finish \ of \ the \ surface.$






PURITAN GREY



PURITAN GREY - Abrasive

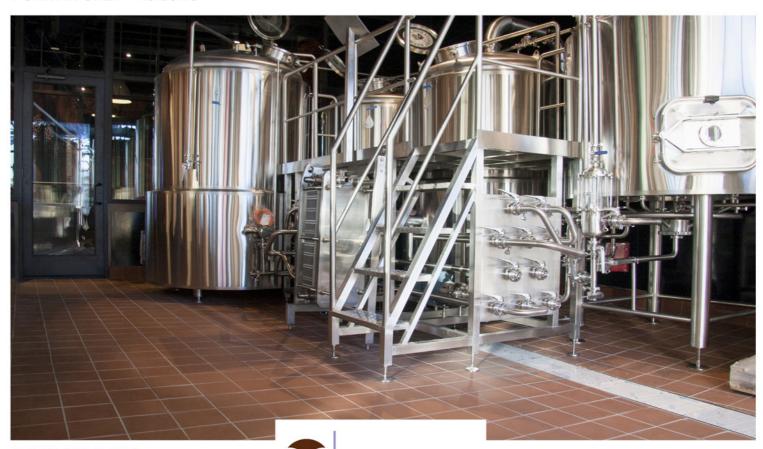

TILES BY TINA www.tilesbytina.com

MAYFLOWER RED