

Victoria Series
**COLOUR
BRICK**
Series

GLAZED PORCELAIN



TILES BY TINA

www.tilesbytina.com • 732.539.4655 • tserpico@tilesbytina.com

COLOUR BRICK SERIES - Glazed Porcelain (Non-Rectified)


Nominal Thickness: 9.5 mm



WHITE 4.8 x 45 cm (2" x 18")
Glossy
Matte



LIGHT GREY 4.8 x 45 cm (2" x 18")
Glossy
Matte



SKY 4.8 x 45 cm (2" x 18")
Glossy
Matte



AQUAMARINE 4.8 x 45 cm (2" x 18")
Glossy
Matte



RED 4.8 x 45 cm (2" x 18")
Glossy


COLOUR BRICK SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Dynamic Co-efficient of Friction	ANSI A137.1-2012	0.42	Conforms
Bending / Breaking Strength	ISO 10545-4	> 1300N	Conforms
Visible Surface Abrasion Resistance (AQM, SKY: PEI-4; WHT & LGR: PEI-5)	ISO 10545-7	PEI-4	Conforms (Except Red)
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ISO 10545-14	> Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

Colour Variation

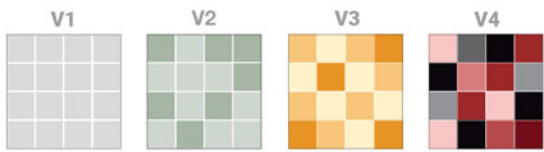

Examples of Recommended Applications

Residential
floors & walls



Commercial
Walls only



Indoor



Outdoor



Wall



Floors



Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
2" x 18" Glossy & Matte	32	7.42	30.72	66



TILES BY TINA
www.tilesbytina.com

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	<ul style="list-style-type: none"> • 66 FlexLite • Duoflex 90 Adhesive 	<ul style="list-style-type: none"> • 5400 Maxi-Flex 	<ul style="list-style-type: none"> • 50 PM Mortar • 52 Versatile PM Mortar • 5400 Maxi-Flex 	n/a
GROUT	<ul style="list-style-type: none"> • 500 PM Unsanded • 1600UPG PM Grout 	<ul style="list-style-type: none"> • 1600UPG PM Grout 	<ul style="list-style-type: none"> • 1600UPG PM Grout • FlexEpoxy 100 Epoxy Grout 	n/a
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	n/a

SURFACE PREPARATION (If Required)

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- Waterproofing: WP900 Waterproof Membrane
- Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

* For a complete listing of FLEX TILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net



“MORE” Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

* Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.





WHITE Glossy



TILES BY TINA
www.tilesbytina.com



SKY Glossy



AQUAMARINE Glossy



TILES BY TINA
www.tilesbytina.com



RED Glossy



LIGHT GREY Glossy



TILES BY TINA
www.tilesbytina.com



WHITE Matte



AQUAMARINE Matte



TILES BY TINA
www.tilesbytina.com



LIGHT GREY Matte