


### **COLORADO** Series - Glazed Porcelain Mosaics (Dot-mounted)

### **SNOW WHITE**



Chip size: 5 x 5 cm (2" x 2") Nominal Sheet size 30.65 x 30.65 cm (12" x 12")

Matte Glossy


#### **TENDER GREY**



Chip size: 5 x 5 cm (2" x 2") Nominal Sheet size 30.65 x 30.65 cm (12" x 12")

Matte

### **BISCUIT**



Chip size: 5 x 5 cm (2" x 2") Nominal Sheet size 30.65 x 30.65 cm (12" x 12")

Matte

### **TAUPE**



Chip size: 5 x 5 cm (2" x 2") Nominal Sheet size 30.65 x 30.65 cm (12" x 12")

Matte



# **COLORADO** Series - Glazed Porcelain Mosaics (Dot-mounted)

### **DARK GREY**



Chip size: 5 x 5 cm (2" x 2") Nominal Sheet size 30.65 x 30.65 cm (12" x 12")

Matte Glossy




#### **COLORADO SERIES**

#### Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	>0.5%	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Stain Resistance	ISO 10545-14	>Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

## **Colour Variation**



## **Examples of Recommended Applications**

Residential



Commercial



Indoor



Outdoor





Floor



## **Packing Details**

TILE SIZE	SHT/BOX	SF/BOX	LB/BOX	BOX/PAL
12" x 12" Sheet (Matte & Glossy)	15	15.18	37.80	72





## **Recommended FLEXTILE Installation Systems**

For other suitable options & complete installation details, visit www.flextile.net

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	• 66 FlexLite Pm Mortar	• 5400 Maxi-Flex • 51/44 Latex Mortar System	<ul><li>66 FlexLite PM Mortar</li><li>52 Versatile PM Mortar</li><li>5400 Maxi-Flex</li></ul>	• 5400 Maxi-Flex • 51/44 Latex Mortar System
GROUT	• 500 PM Unsanded • 1600UPG PM Grout	• 1600UPG PM Grout	• 1600UPG PM Grout	• 1600UPG PM Grout
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

#### **SURFACE PREPARATION (If Required)**

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- · Waterproofing: WP900 Waterproof Membrane
- · Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

<sup>\*</sup> For a complete listing of FLEXTILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net




### "MORE" Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

 $<sup>*</sup>Always \ test \ in an inconspicuous \ area \ to \ make \ sure \ the \ product \ is \ achieving \ the \ desired \ results \ and \ is \ not \ damaging \ the \ finish \ of \ the \ surface.$ 



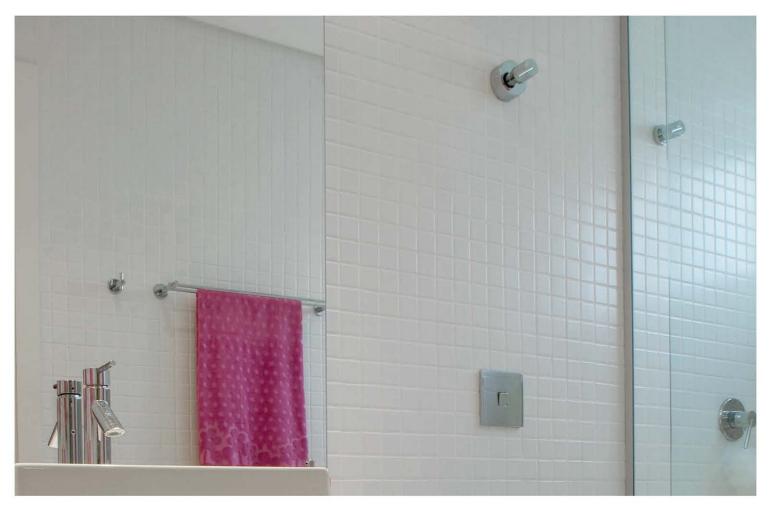



**SNOW WHITE Matte**