

Victoria Series **NEW** **COLORS** Series

PORCELAIN

GLAZED PORCELAIN




TILES BY TINA

www.tilesbytina.com • 732.539.4655 • tserpico@tilesbytina.com

NEW COLORS SERIES - Coloured Body Porcelain (Rectified) 9mm thickness


WHITE

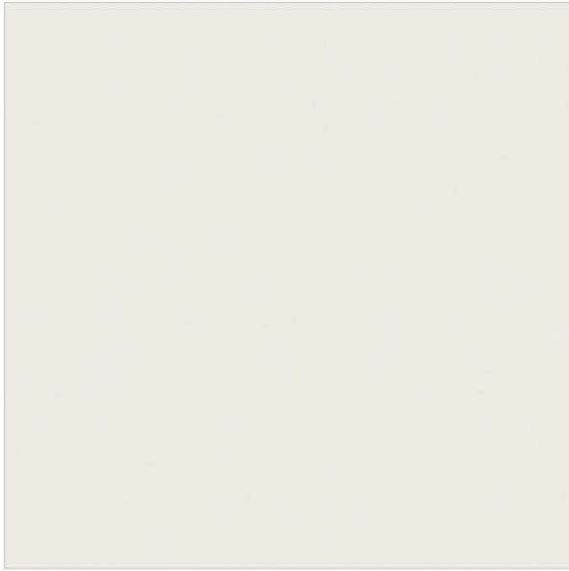

Matte Finish

30 x 60 cm (12" x 24")
60 x 60 cm (24" x 24")

PEARL



Matte Finish

30 x 60 cm (12" x 24")

GREY



Matte Finish

30 x 60 cm (12" x 24")
60 x 60 cm (24" x 24")

GREEN



Matte Finish

30 x 60 cm (12" x 24")




NEW COLORS SERIES - Coloured Body Porcelain (Rectified) 9mm thickness

BLUE



Matte Finish
30 x 60 cm (12" x 24")

RED

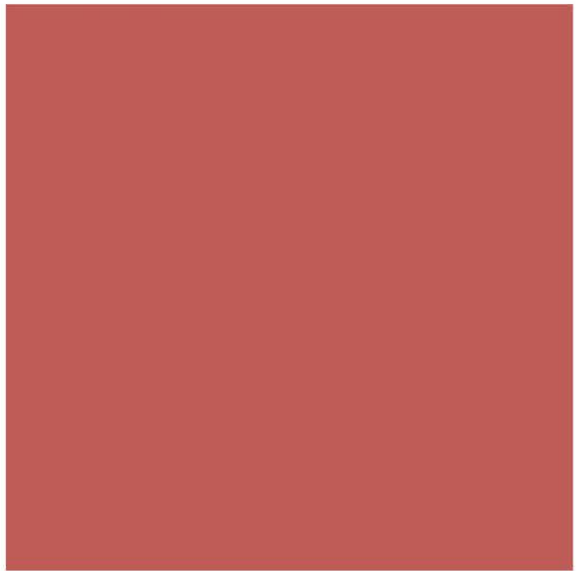

Matte Finish
30 x 60 cm (12" x 24")

BLACK




Matte Finish
30 x 60 cm (12" x 24")




NEW COLORS SERIES - Glazed Porcelain (Rectified) 9 mm thickness

WHITE

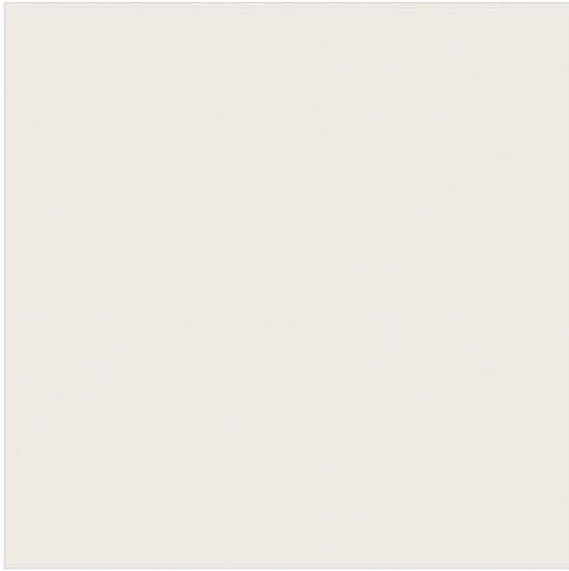

Glossy Finish
30 x 60 cm (12" x 24")
60 x 60 cm (24" x 24")

PEARL



Glossy Finish
30 x 60 cm (12" x 24")

GREY



Glossy Finish
30 x 60 cm (12" x 24")
60 x 60 cm (24" x 24")

BLACK



Glossy Finish
30 x 60 cm (12" x 24")



TILES BY TINA
www.tilesbytina.com


NEW COLORS SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
COLOURED BODY PORCELAIN			
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Bending / Breaking Strength	ISO 10545-4	>1300N	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ISO 10545-14	> Class 3	Conforms
GLAZED PORCELAIN			
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Bending / Breaking Strength	ISO 10545-4	>1300N	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ISO 10545-14	> Class 3	Conforms
Visible Surface Abrasion Resistance	ISO 10545-7	PEI 4	White - Conforms

Technical data is supplied by the manufacturer and is subject to change at any time.

Colour Variation

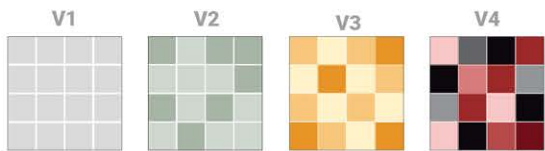

Examples of Recommended Applications

Residential



Commercial



Indoor



Outdoor



Wall



Floor



Porcelain:

Residential and commercial walls & floors.

Glazed Porcelain:

Residential walls and floors and commercial walls.

Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
12" x 24" Matte & Glossy	8	15.50	66.16	40
24" x 24" Matte & Glossy	4	15.50	59.52	32



TILES BY TINA
www.tilesbytina.com

COLOURED BODY PORCELAIN

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	<ul style="list-style-type: none"> • 66 FlexLite • 56SR LHT Mortar 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System 	<ul style="list-style-type: none"> • 56SR LHT Mortar • 5400 Maxi-Flex 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System
GROUT	<ul style="list-style-type: none"> • 500 PM Unsanded • 600 PM Sanded • 1600UPG PM Grout 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600UPG PM Grout 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600UPG PM Grout • FlexEpoxy 100 Epoxy Grout 	<ul style="list-style-type: none"> • 600 PM Sanded • 1600UPG PM Grout
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

SURFACE PREPARATION (If Required)

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- Waterproofing: WP900 Waterproof Membrane
- Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

* For a complete listing of FLEXITILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net

GLAZED PORCELAIN

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	<ul style="list-style-type: none"> • 66 FlexLite • 56SR LHT Mortar 	<ul style="list-style-type: none"> • 5400 Maxi-Flex • 51/44 Latex Mortar System 	<ul style="list-style-type: none"> • 56SR LHT Mortar • 5400 Maxi-Flex 	n/a
GROUT	<ul style="list-style-type: none"> • 500 PM Unsanded • 1600UPG PM Grout 	<ul style="list-style-type: none"> • 1600UPG PM Grout 	<ul style="list-style-type: none"> • 1600UPG PM Grout 	n/a
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	n/a

SURFACE PREPARATION (If Required)

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- Waterproofing: WP900 Waterproof Membrane
- Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

* For a complete listing of FLEXITILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net






"MORE" Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed


**Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.*

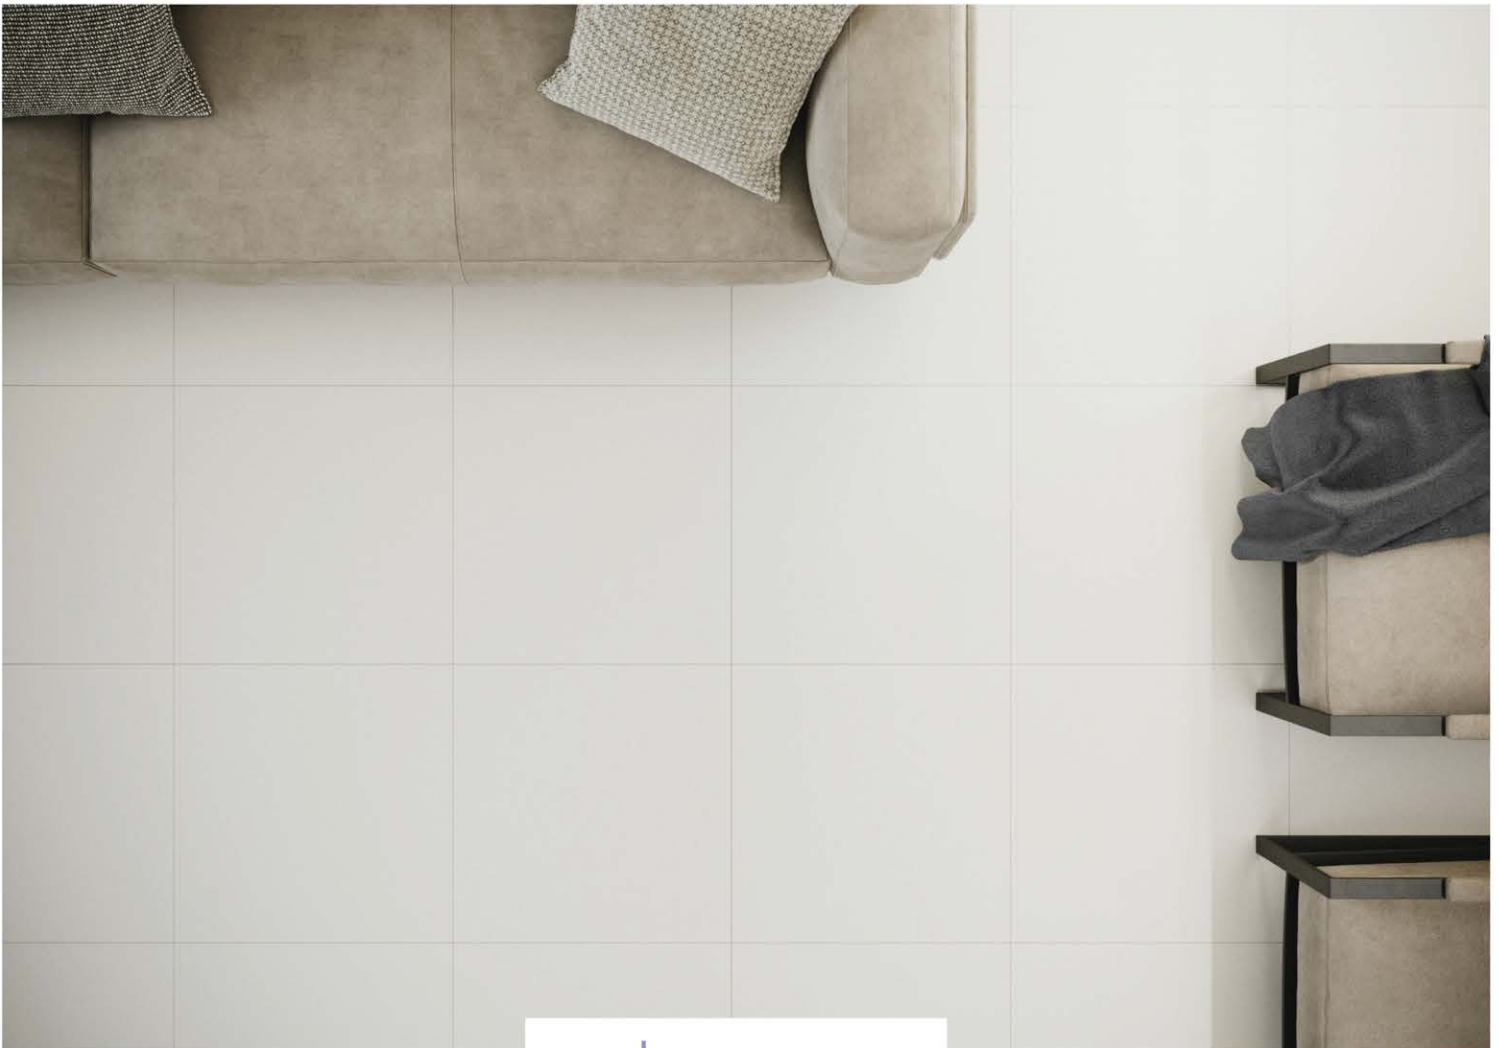

WHITE



TILES BY TINA
www.tilesbytina.com

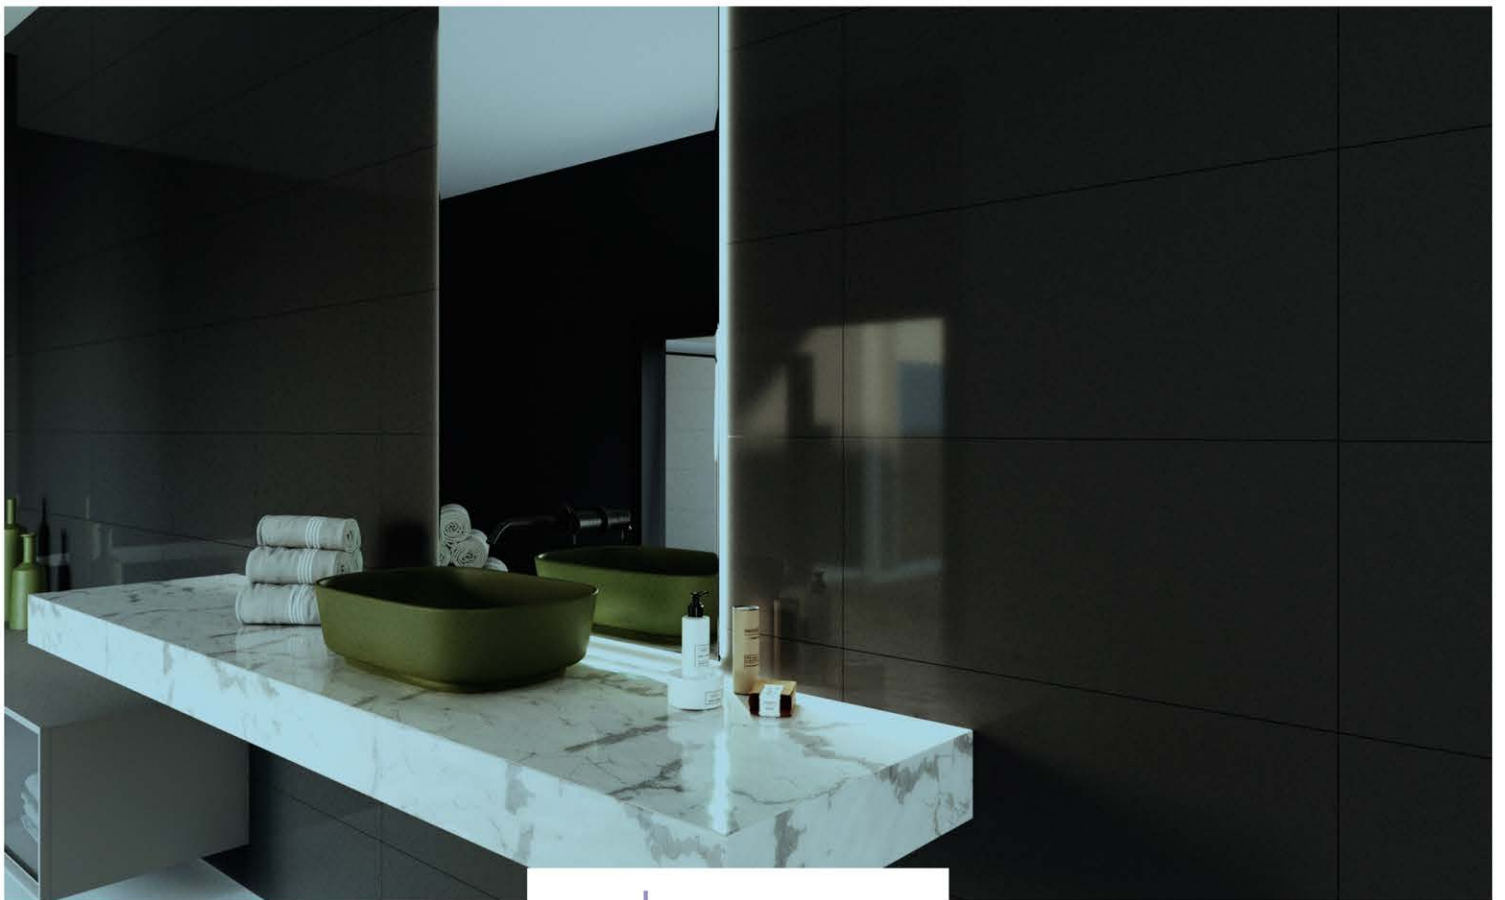

BLACK



TILES BY TINA
www.tilesbytina.com



GREEN




BLUE



TILES BY TINA
www.tilesbytina.com



GREY

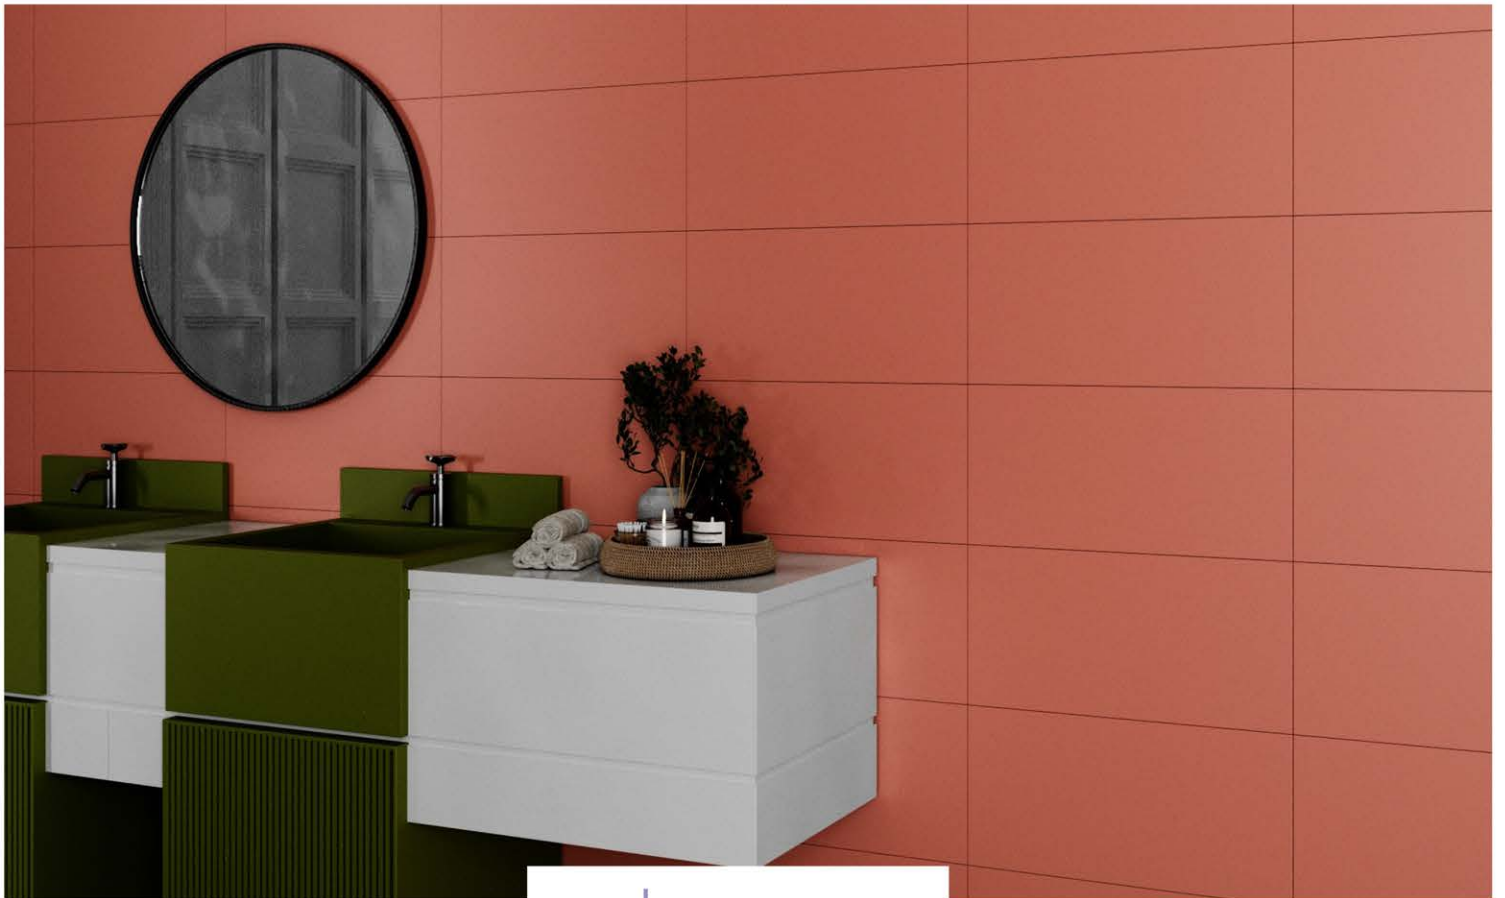

RED



TILES BY TINA
www.tilesbytina.com