

Victoria Series

SKYLINE

Series

PORCELAIN



TILES BY TINA

www.tilesbytina.com • 732.539.4655 • tserpico@tilesbytina.com

SKYLINE SERIES - Coloured Body Porcelain (Non-Rectified)




CAMELIA (White)

Matte Finish

Thickness: 8.5mm

7.5 x 60 cm (3" x 24")

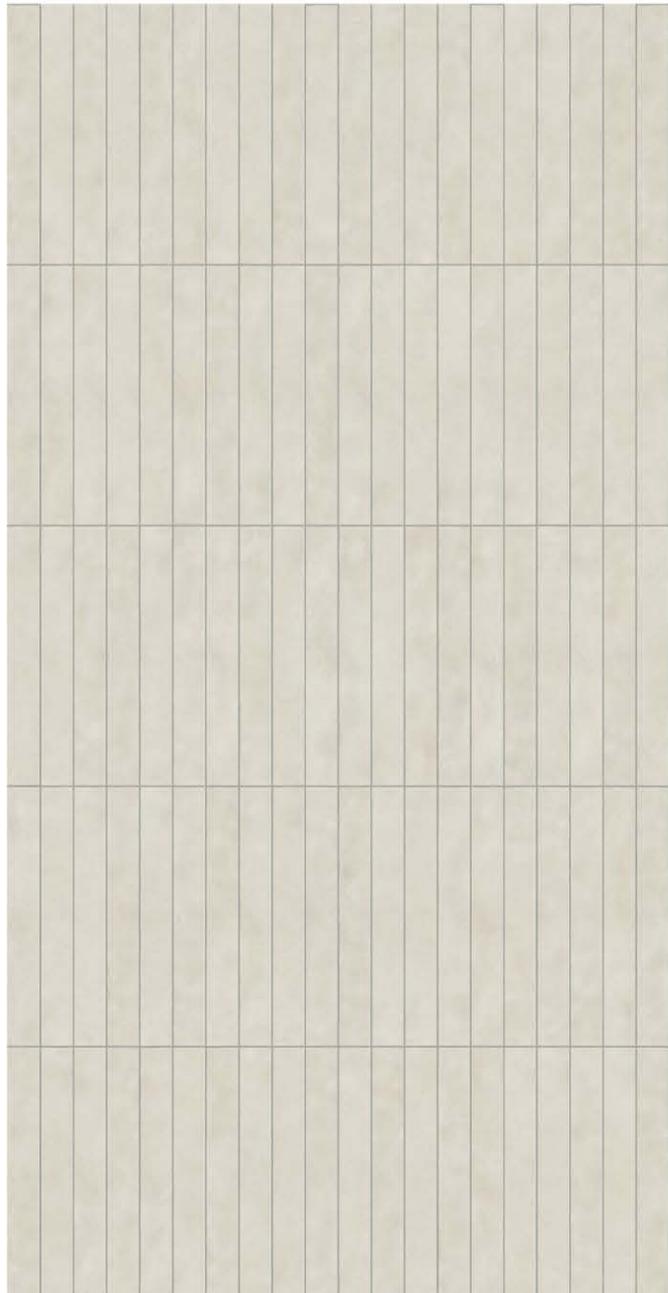

TILES BY TINA
www.tilesbytina.com

SKYLINE SERIES - Coloured Body Porcelain (Non-Rectified)




AVENA (Ivory)

Matte Finish

Thickness: 8.5mm

7.5 x 60 cm (3" x 24")

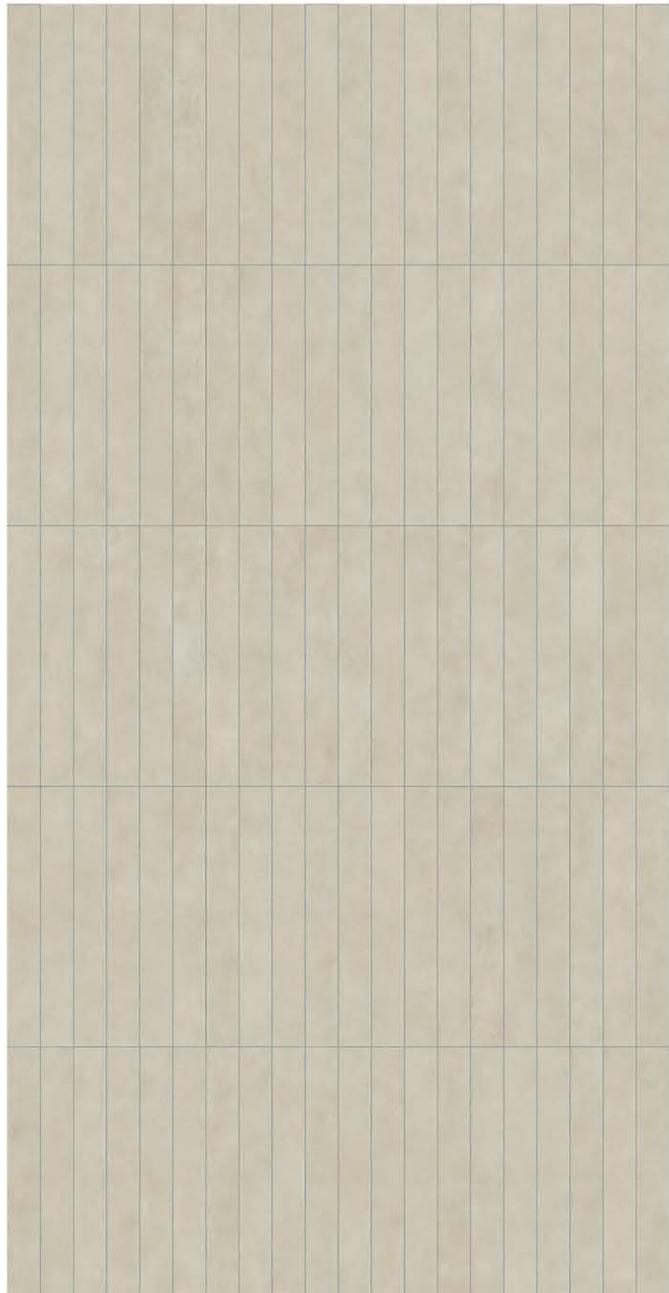

TILES BY TINA
www.tilesbytina.com

SKYLINE SERIES - Coloured Body Porcelain (Non-Rectified)




BETULLA (Light Grey)

Matte Finish

Thickness: 8.5mm

7.5 x 60 cm (3" x 24")

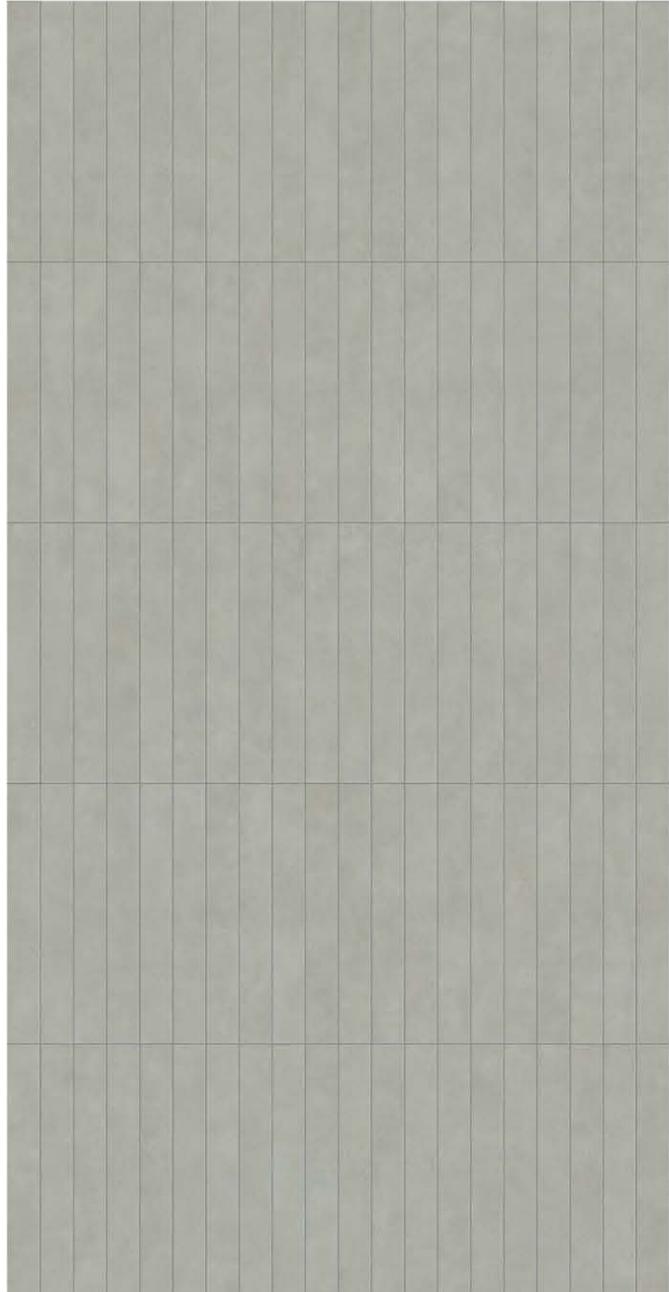

TILES BY TINA
www.tilesbytina.com

SKYLINE SERIES - Coloured Body Porcelain (Non-Rectified)




PIMENTO

Matte Finish

Thickness: 8.5mm

7.5 x 60 cm (3" x 24")

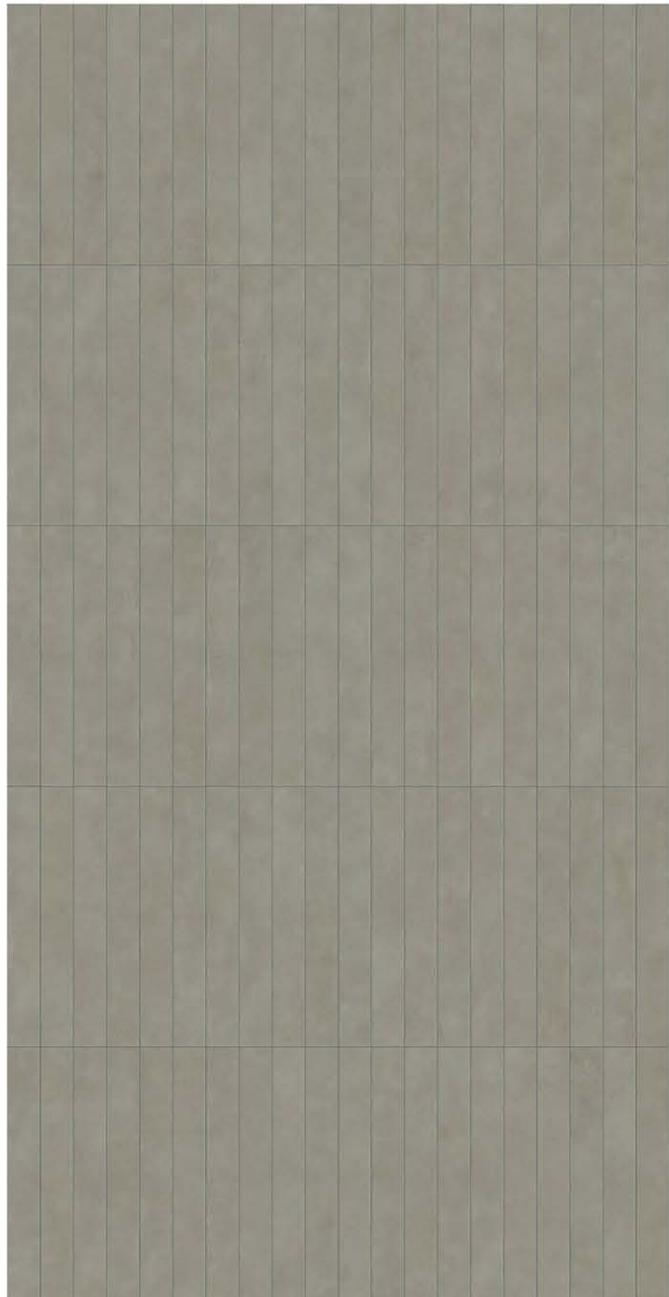

TILES BY TINA
www.tilesbytina.com

SKYLINE SERIES - Coloured Body Porcelain (Non-Rectified)




MIRTO (Dark Green)

Matte Finish

Thickness: 8.5mm

7.5 x 60 cm (3" x 24")

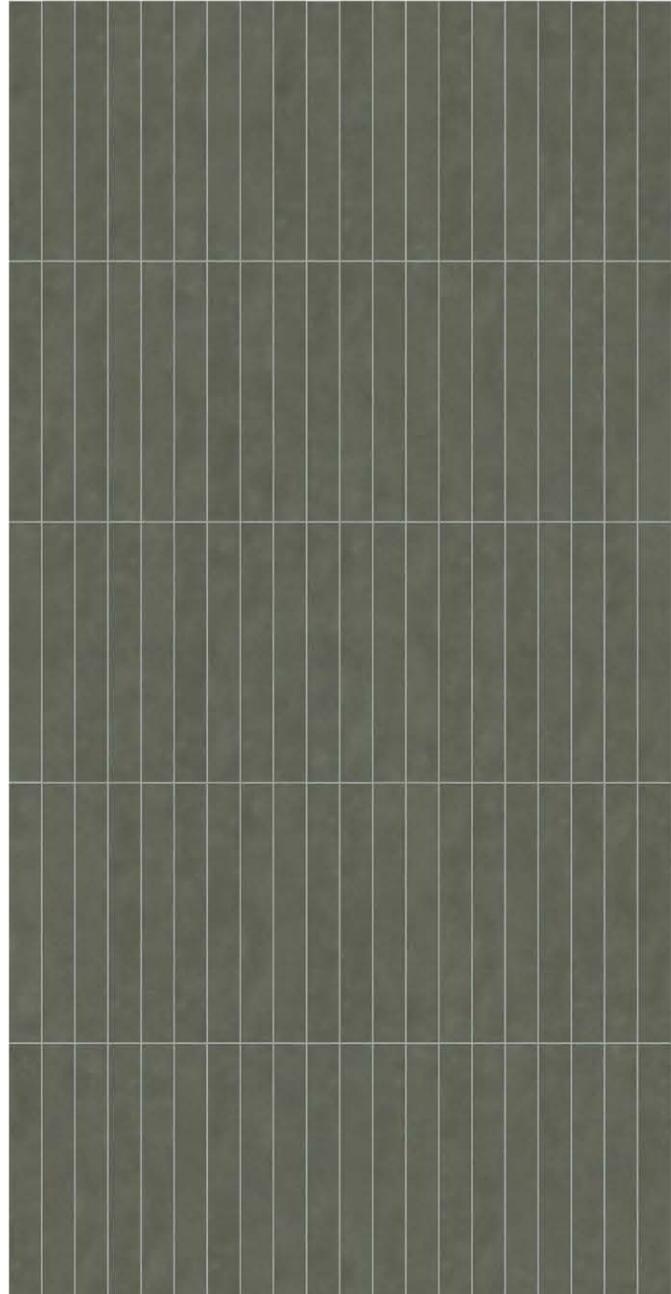

TILES BY TINA
www.tilesbytina.com

SKYLINE SERIES - Coloured Body Porcelain (Non-Rectified)




GINEPRO (Dark Blue)

Matte Finish

Thickness: 8.5mm

7.5 x 60 cm (3" x 24")

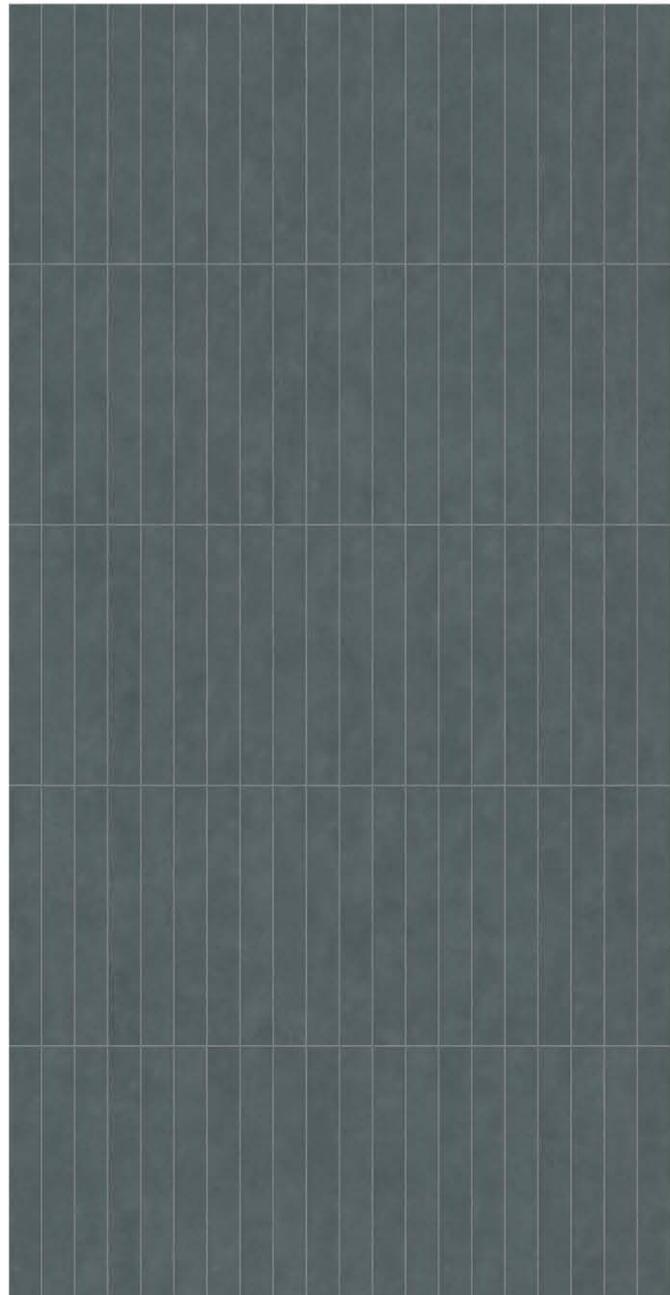

TILES BY TINA
www.tilesbytina.com

SKYLINE SERIES - Coloured Body Porcelain (Non-Rectified)




MORA (Black)

Matte Finish

Thickness: 8.5mm

7.5 x 60 cm (3" x 24")

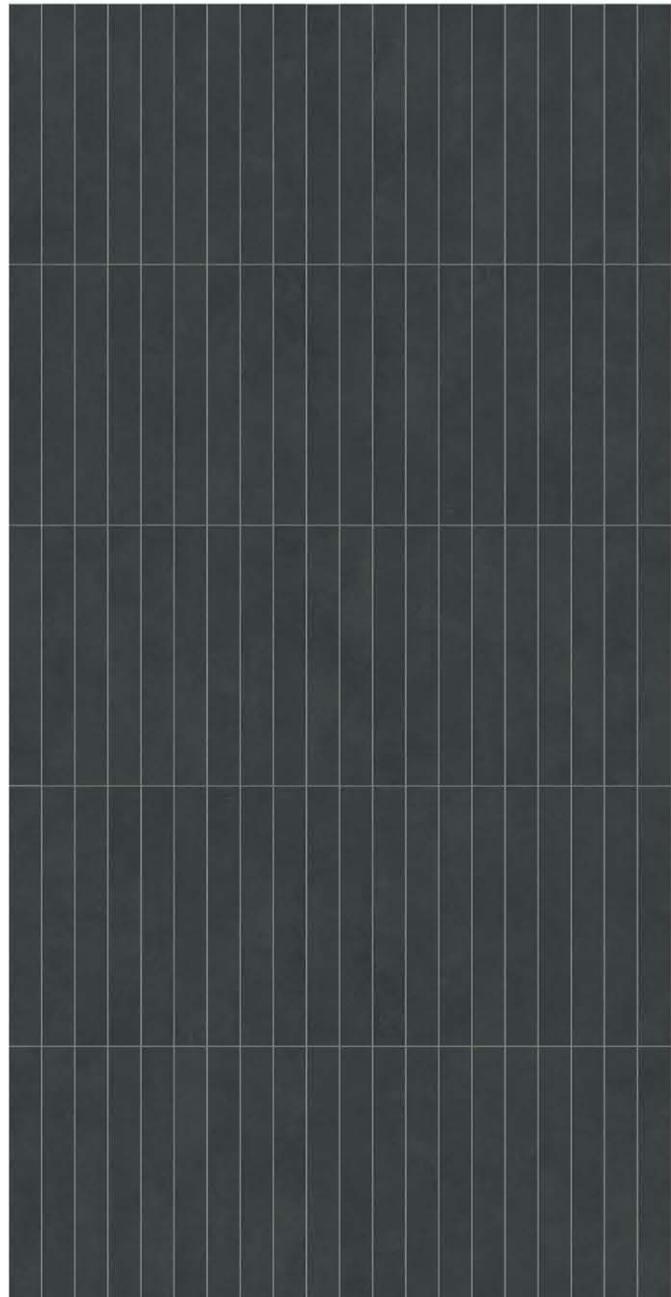


TILES BY TINA
www.tilesbytina.com

SKYLINE SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Dynamic Co-efficient of Friction	ANSI A137.1/2012	> 0.42	Conforms
Bending / Breaking Strength	ISO 10545-4	> 1300N	Conforms
Slip Resistance	DIN 51130	R-9	Conforms
Deep Abrasion Resistance	ISO 10545-6	≤ 175mm ³	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ISO 10545-14	> Class 3	Conforms

Colour Variation

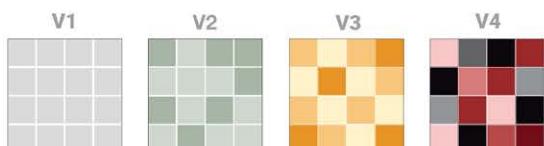

Examples of Recommended Applications

Residential Commercial



Indoor



Outdoor



Wall



Floor



Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
3" x 24" Matte	22	10.66	42.02	60

Recommended FLEX TILE Installation Systems

For other suitable options & complete installation details, visit www.flextile.net

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	• 66 FlexLite	• 5400 Maxi-Flex • 51/44 Latex Mortar System	• 52 Versatile PM Mortar • 5400 Maxi-Flex	• 5400 Maxi-Flex • 51/44 Latex Mortar System
GROUT	• 500 PM Unsanded • 600 PM Sanded • 1600UPG PM Grout	• 600 PM Sanded • 1600UPG PM Grout	• 600 PM Sanded • 1600UPG PM Grout • FlexEpoxy 100 Epoxy Grout	• 600 PM Sanded • 1600UPG PM Grout
CAULKING	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

SURFACE PREPARATION (If Required)

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- Waterproofing: WP900 Waterproof Membrane
- Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

* For a complete listing of FLEX TILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net



TILES BY TINA
www.tilesbytina.com



CAMELIA & GINEPRO



MIRTO & AVENA



TILES BY TINA
www.tilesbytina.com




BETULLA & CAMELIA



TILES BY TINA
www.tilesbytina.com




AVENA & MORA

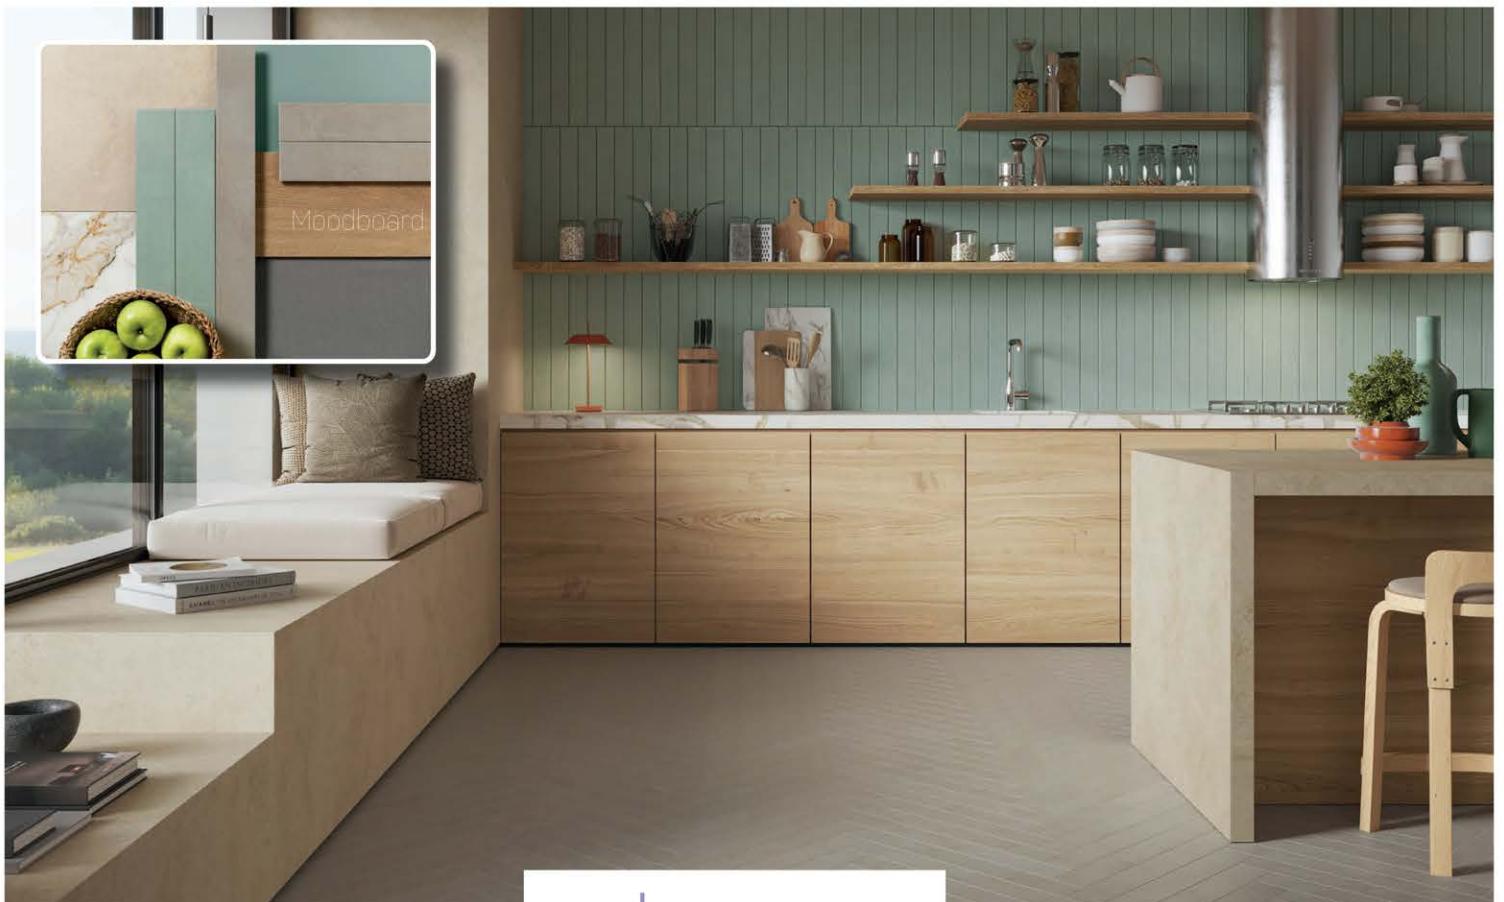


PIMENTO



TILES BY TINA
www.tilesbytina.com

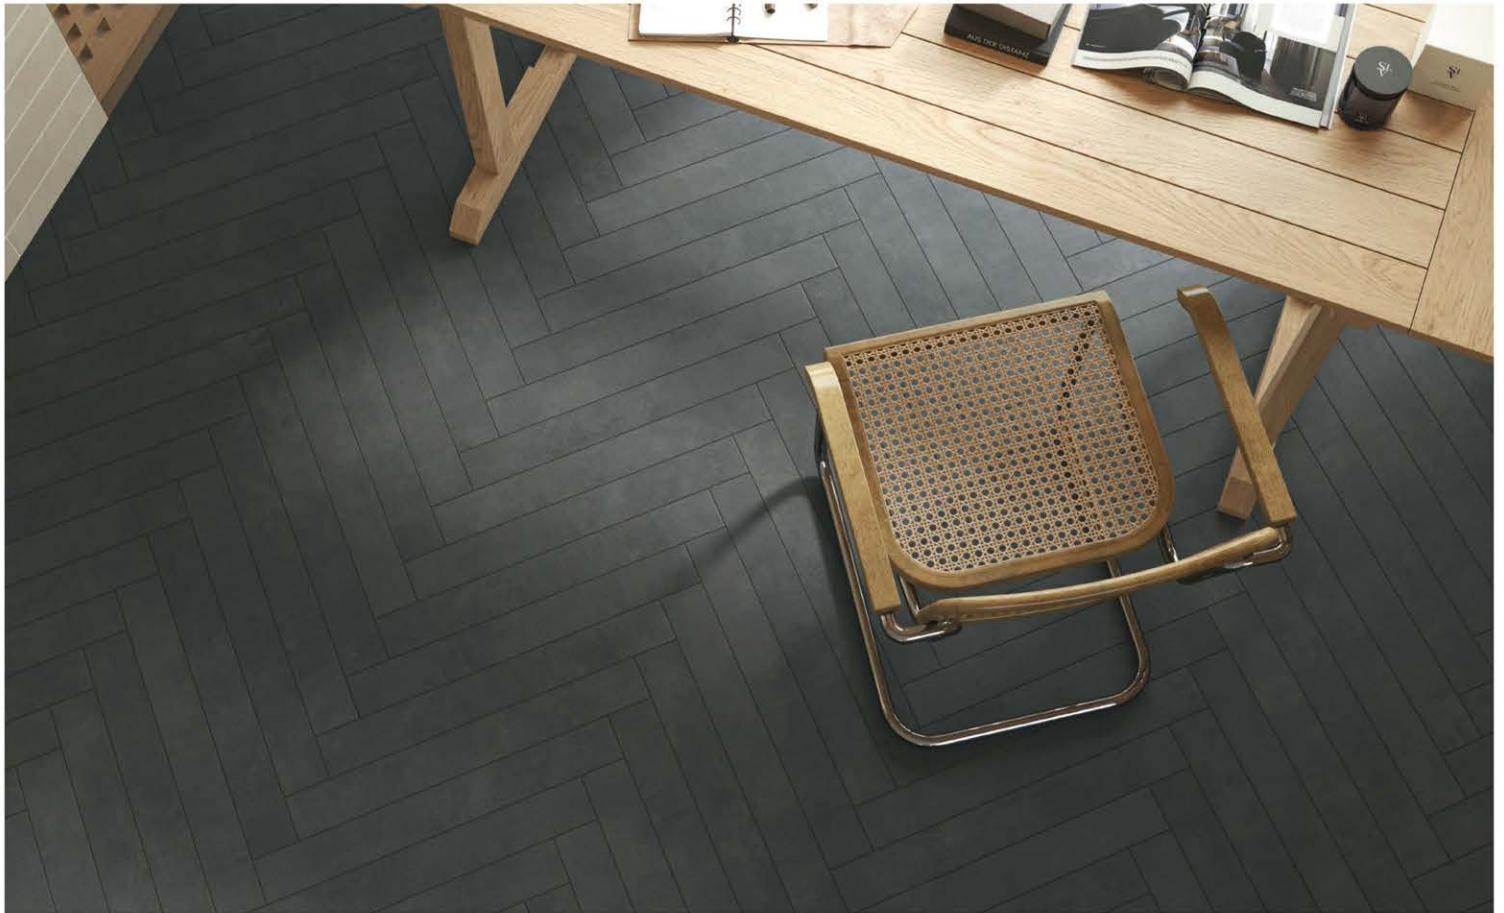

MORA

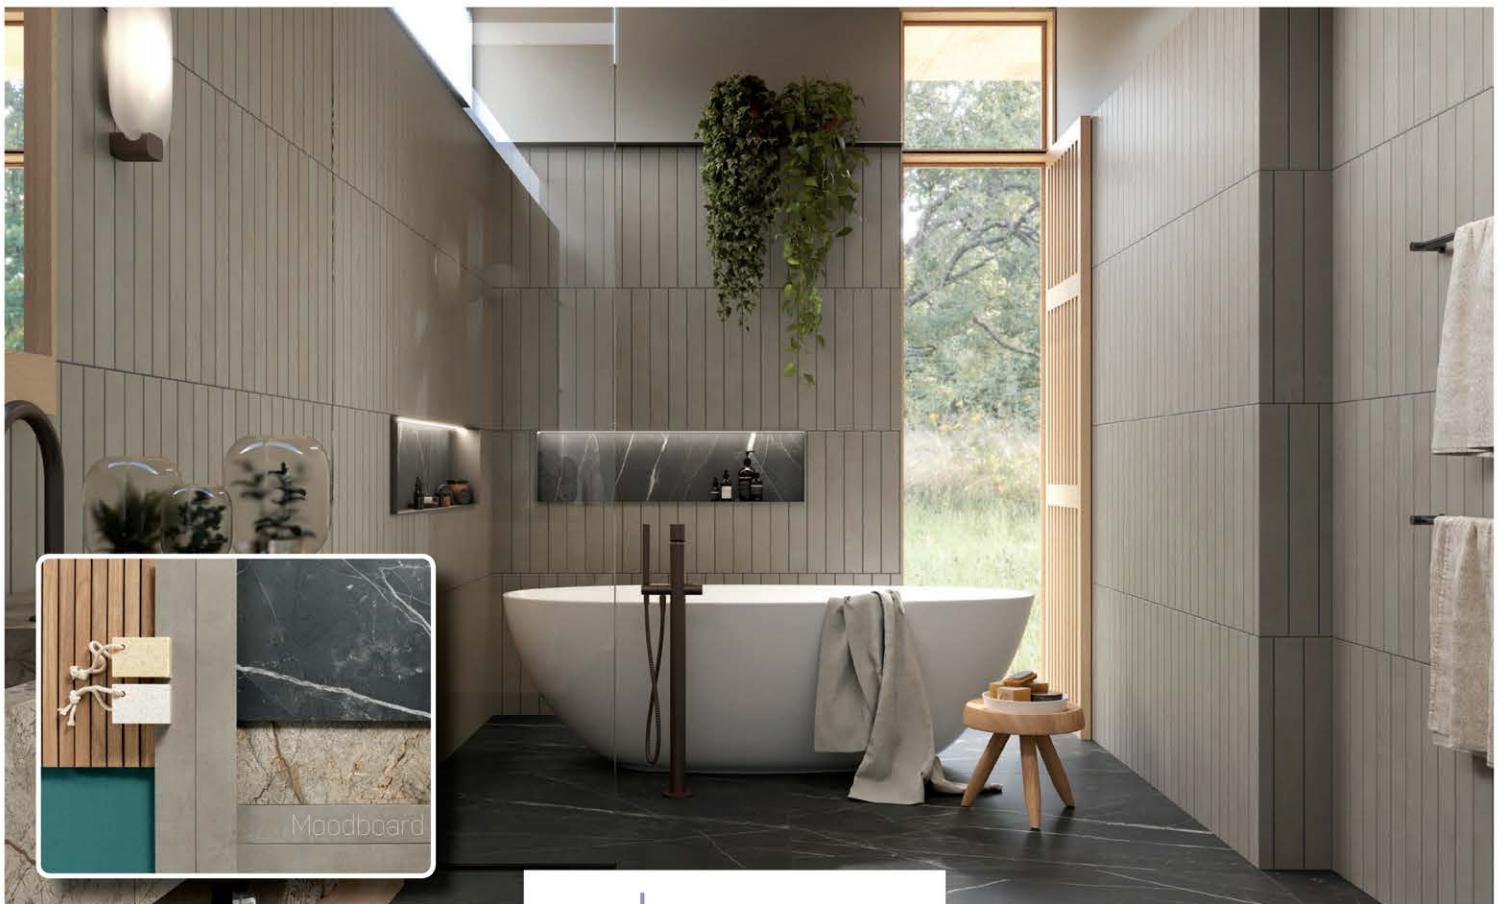

PIMENTO



TILES BY TINA
www.tilesbytina.com